




# SUBMITTAL DATA SHEET

## CONDENSATE PUMP

MODEL : NAFR-65FA

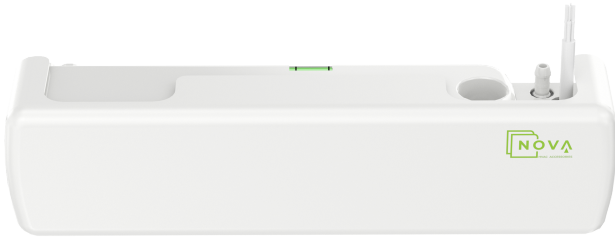

**Max. flow**  
10.6GPH (40L/H)



**Sound level**  
16dB(A) @ 3.3ft(1M)



**Max. discharge head**  
65.6ft(20 M)

### Features

- Capacitive Sensor
- Built-in Operation Tracking
- Variable Flow Rate
- Ultra-quiet Operation
- Diagnostic LED
- Up to 157,000Btu/h / 46kw
- Quick and Simple Installation

### Specification

Model	NAFR-65FA
Power Supply	115V&230V 50/60Hz
Power	<4W
Max. flow	10.6GPH(40L/H), range from 5.3-10.6GPH(20-40L/H)
Sound Level	16dB(A) @ 3.3ft(1M)
Max. discharge Head	65.6ft(20M)
Max. suction Lift	6.6ft(2M)
Max. unit Output	157,000Btu/h(46kw)
Safety Switch	3A Normally closed
Max. water Temperature	104°F(40°C)
Discharge Tube	1/4in(6mm) ID
Class	II appliance <input type="checkbox"/>
Rated	Continuous
IP Protection	Fully potted, IP-45
L × W × H (inch)	11-1/8inch × 2-1/8inch × 2-3/4 inch
L × W × H (mm)	281mm × 55mm × 69mm

### Dimension and Typical Performance

