



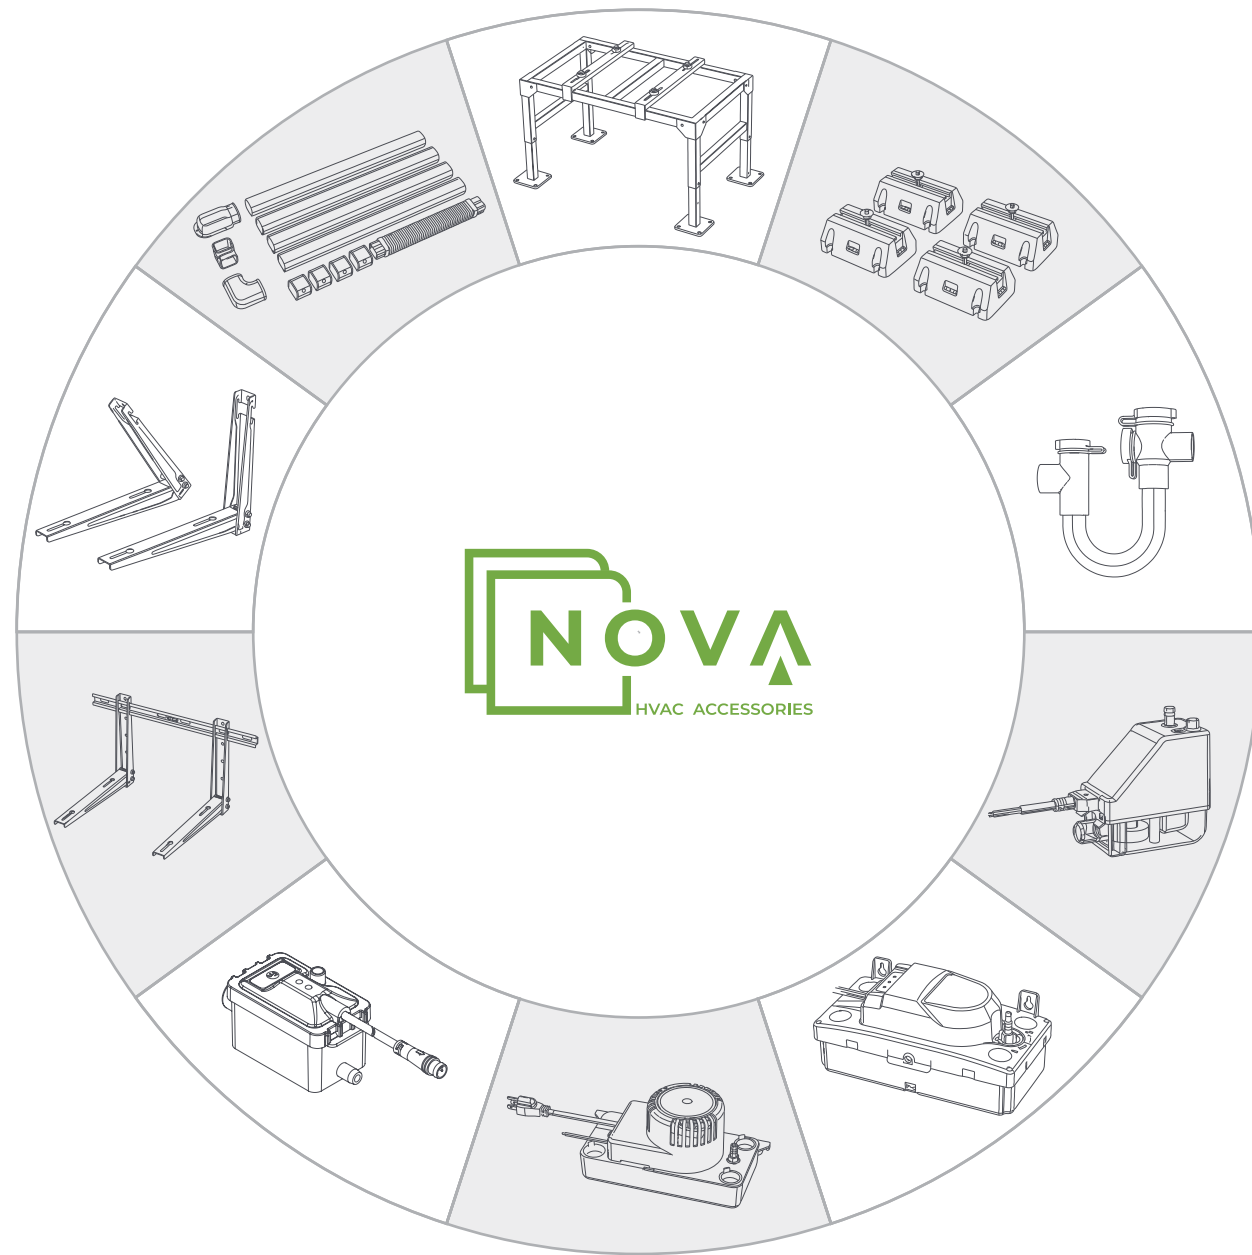

YOUR PARTNER FOR PROFESSIONAL HVAC ACCESSORIES

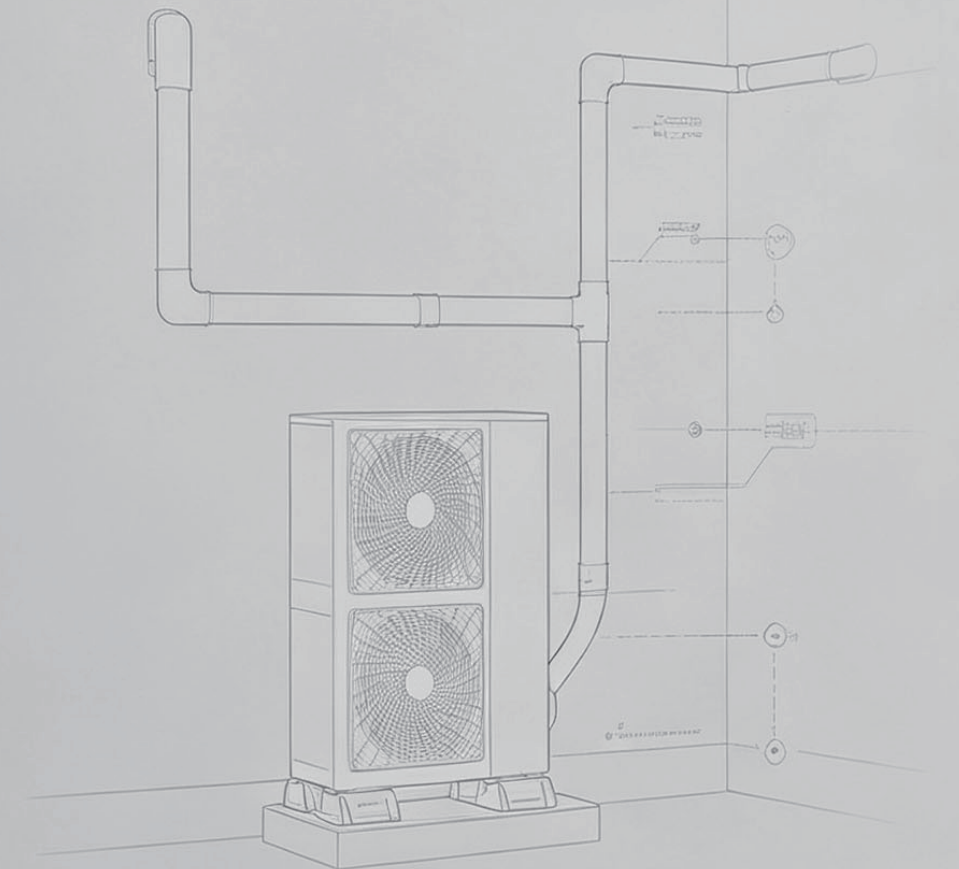

NOVA HVAC PARTS

Tel.: +1 888-580-2422

<http://www.mynova.us>

TABLE OF CONTENTS

Rubber Block Anti Vibration Support	01-02
Air Conditioner Bracket	03-10
Decorative PVC Lineset Cover Kit	11-16
Condensate Pump	17-36






Long Leg Anti-vibration Pad
Reduce operating noise
High load bearing and easy installation
Resistant to all weather elements

RUBBER BLOCK ANTI VIBRATION SUPPORT

 MODEL NO.NBF250-160-95

Rubber Block Anti Vibration Support

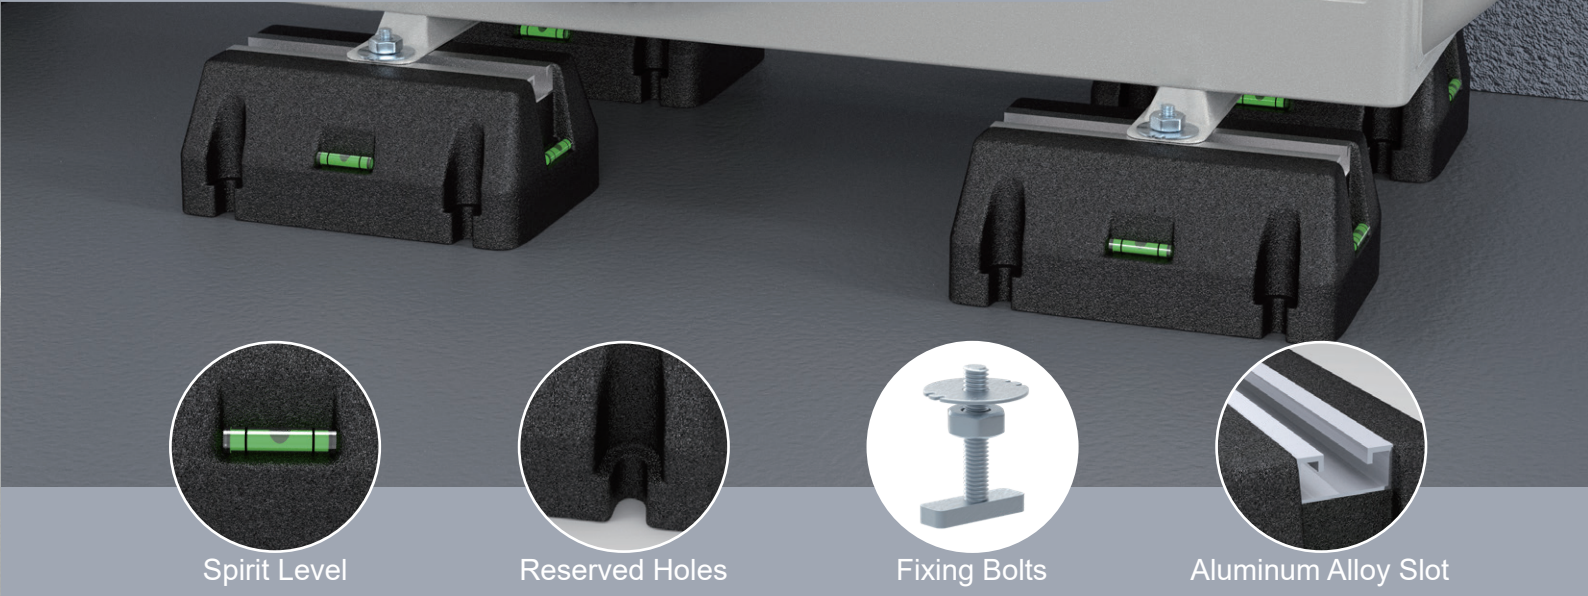

4× Rubber mounting base



4× Equipment mounting screw set



Resistant to all weather elements



Easy installation




Reduce operating noise




High load bearing

Product Specifications

-Material:	Rubber
-UV Resistant:	Yes
-Color:	Black
-Mounting Track:	Yes

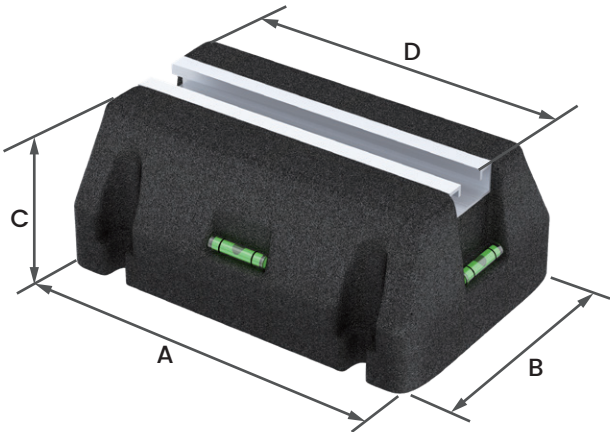

Item Name: NBF250-160-95			
Model No.	Size: A×B×C×D(mm)	Size: A×B×C×D(inch)	Pcs/Set
NBF250-160-95	250×163×98×210	9 ⁷ / ₈ ×6 ³ / ₈ ×3 ⁷ / ₈ ×8 ¹ / ₄	4

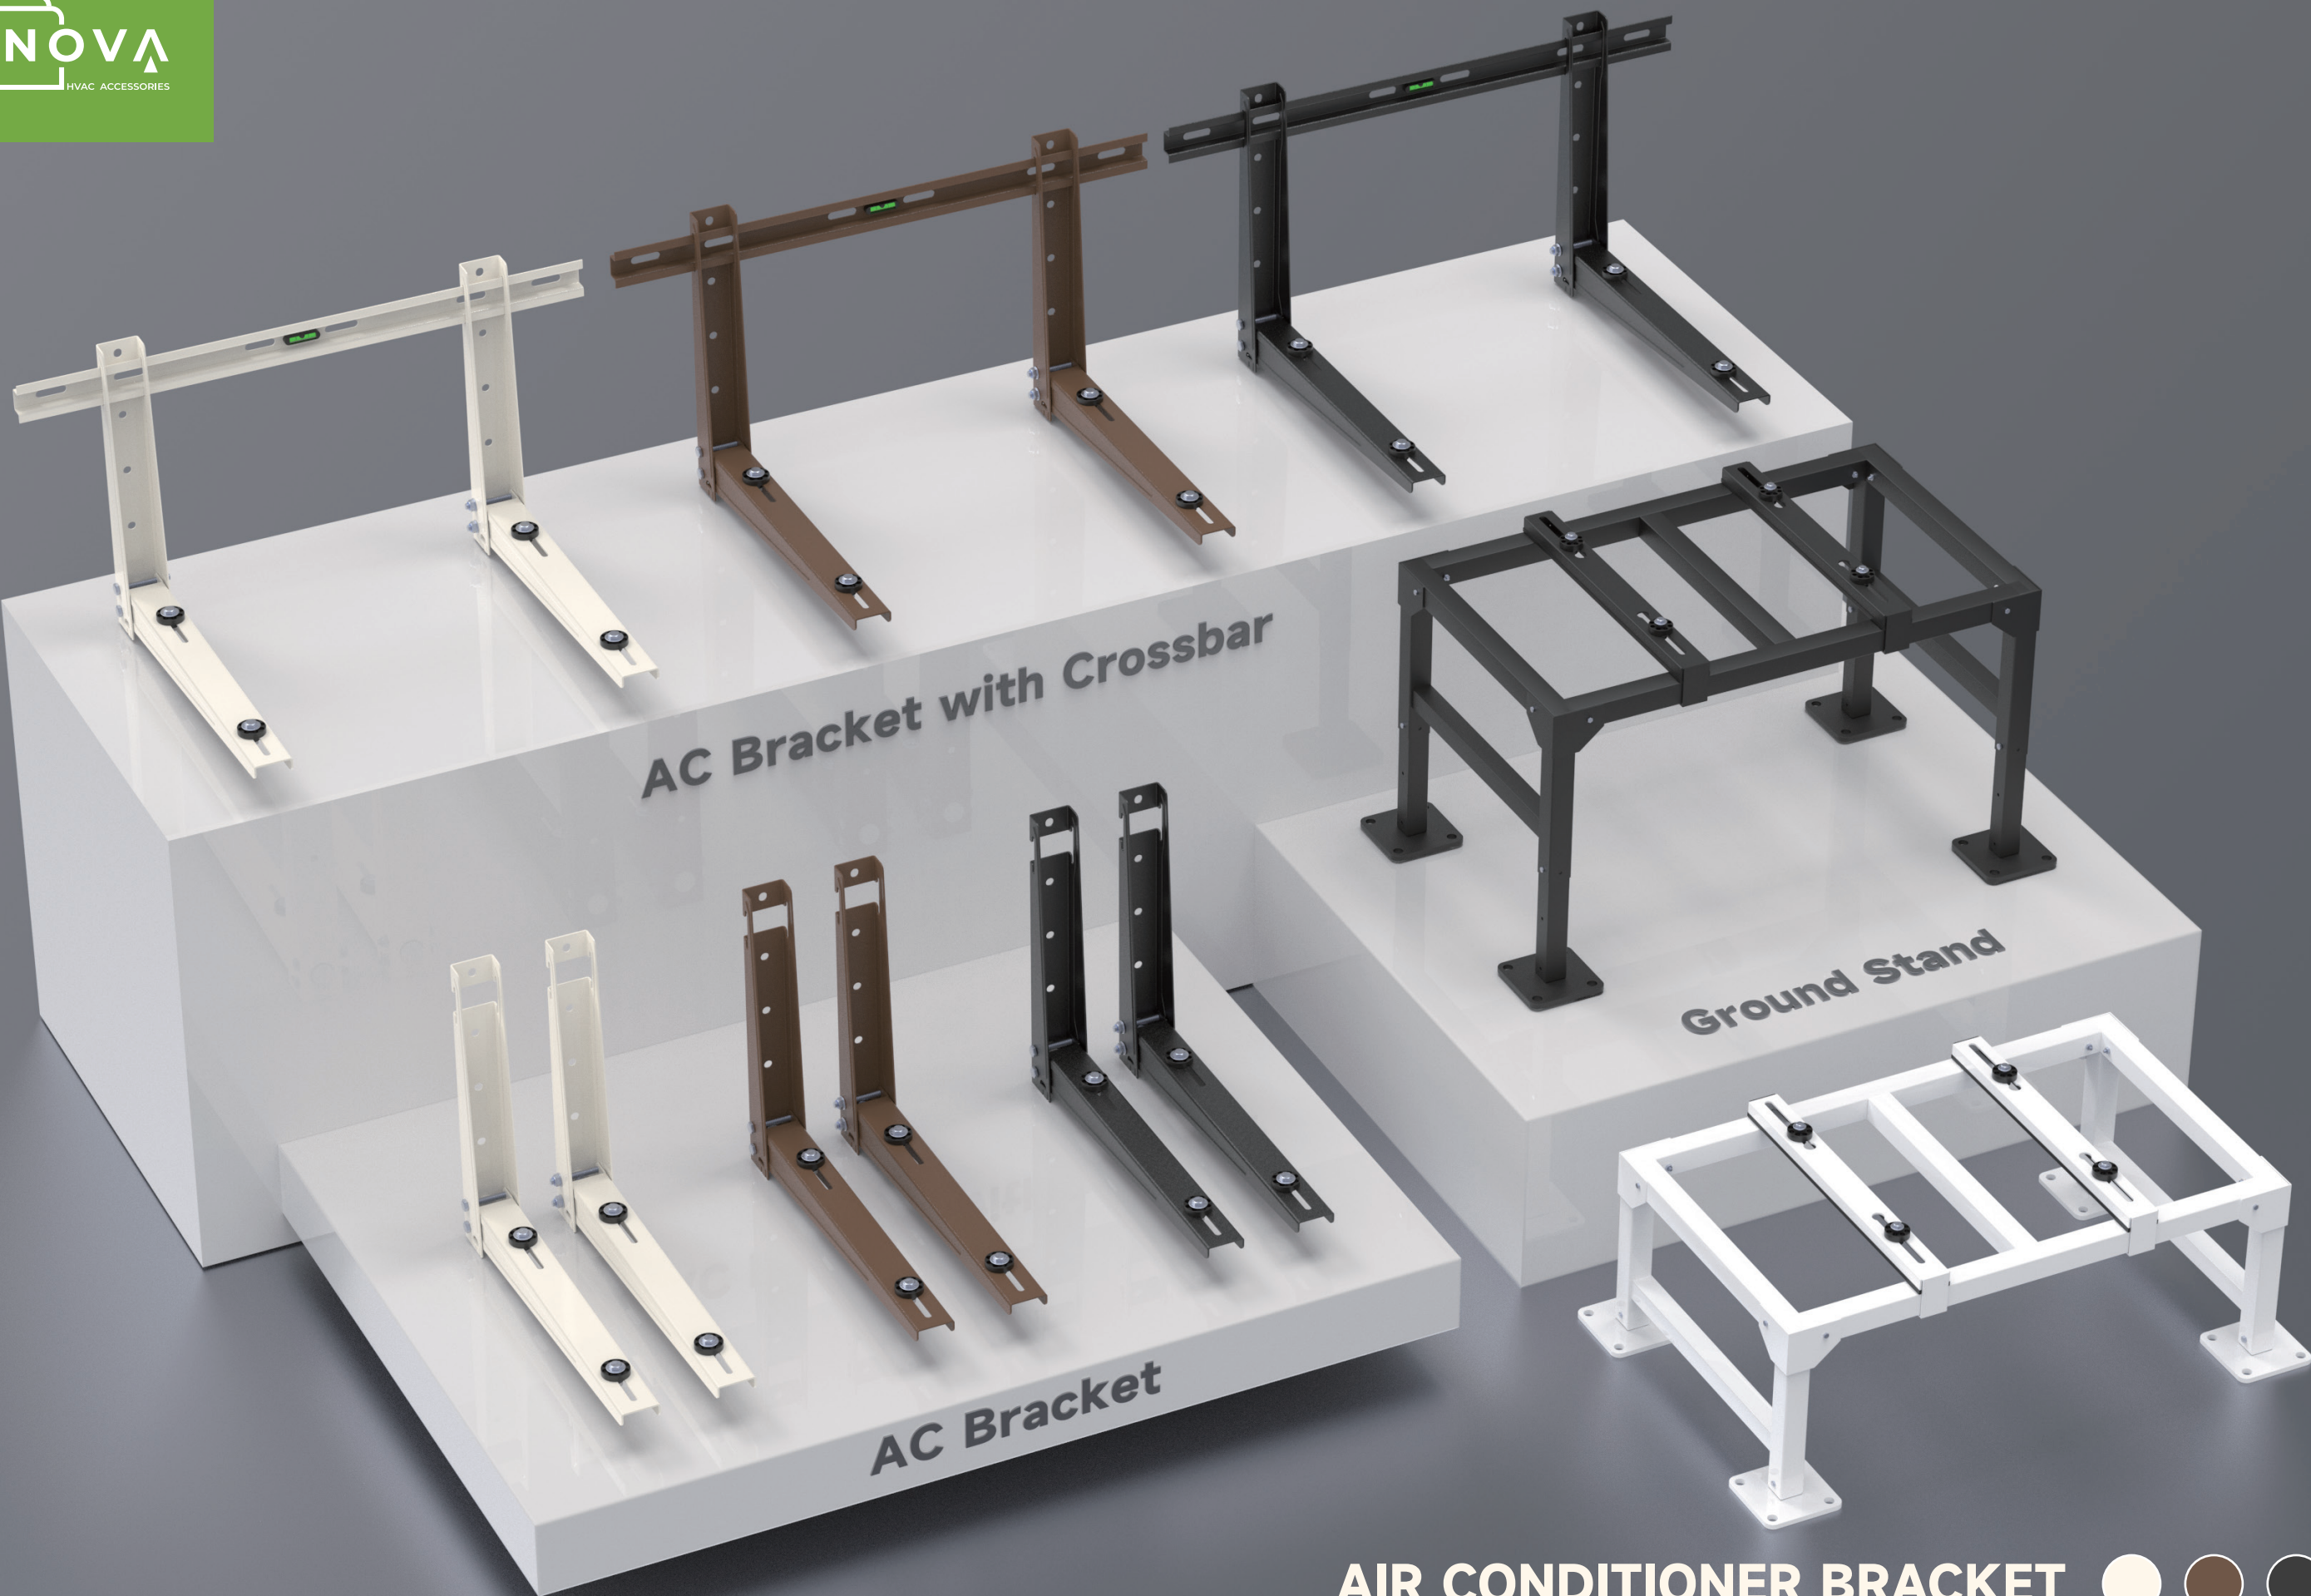

AIR CONDITIONER BRACKET ● ● ●



Color Available



AIR CONDITIONER BRACKET


For wall mount, raise equipment above ground for protection from snow and flood

MODEL NO.N1822 Foldable type



- Foldable design for quick on-site installation
- Powder coating finish
- High strength and stability
- Weather-resistant
- Pre-punched holes for easy installation to wall structure

Loading Capacity Up to
485lbs

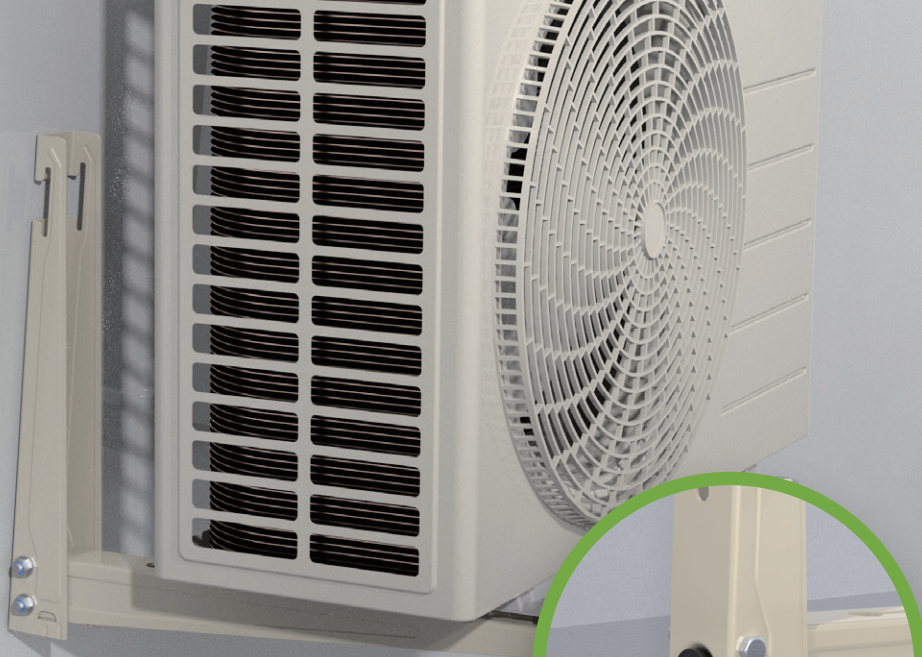

Vertical Stabilizer



Weather Proof Design




Durable Construction



Secure Protection



Paintable Design

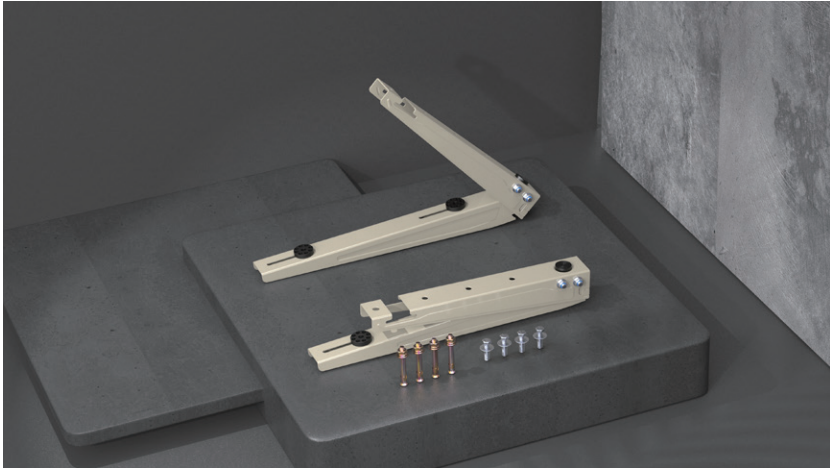

Product Specifications

-Material:	Galvanized Steel
-Sheet Gauge:	14 GA
-Rubber used for isolator:	TPE rubber
-UV Resistant:	Yes
-Powder Coating:	Yes
-Color:	White / Brown / Black

Item Name: N1822					
Model No.	Size :H×D(in)	Size :H×D(mm)	Thickness	N.W	Max Loading
N1822	17¾×22	450×560	14 GA (1.8mm)	8.8lbs(4kg)	485 lbs



-Bracket is designed for masonry wall mount, for stud wall mount proper blocking must be made between studs to ensure proper wall bracing will accommodate bracket weight load.
-The bracket must be securely fixed to wall with all screws fastened tightly.
-Do not make any modification to bracket assembly or fixings




Color Available



AC BRACKET WITH CROSSBAR


For wall mount, raise equipment above ground for protection from snow and flood

MODEL NO.N341822B Foldable type

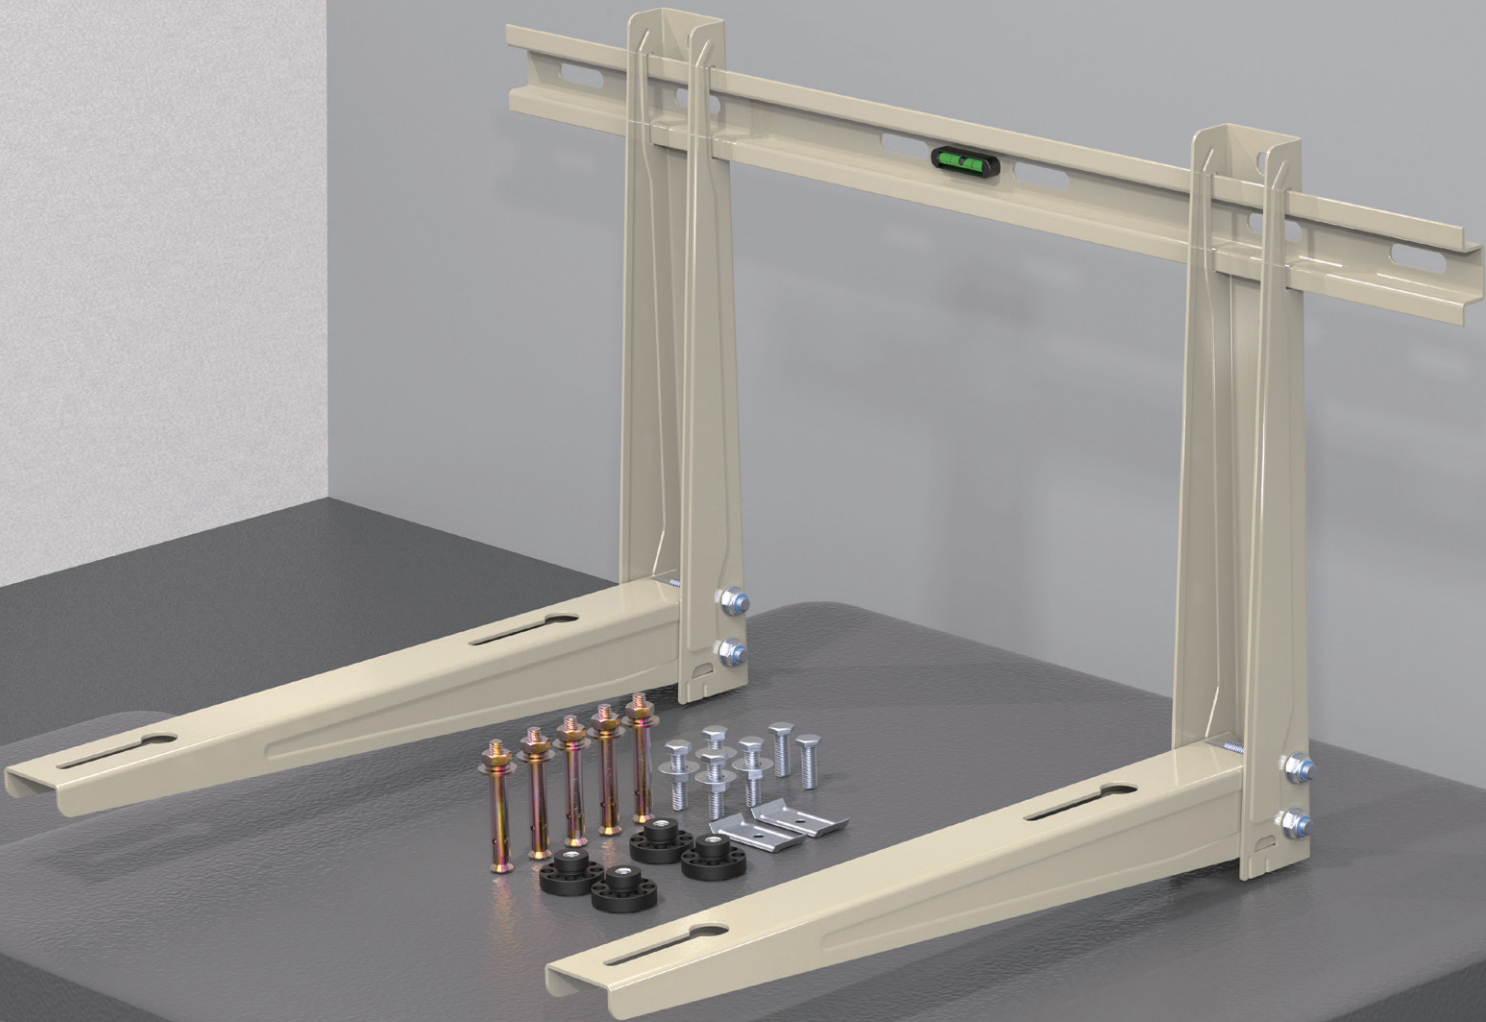

- Cross bar design with bubble level
- Powder coating finish
- Weather resistant
- High strength and stability
- Wear-resistant, waterproof and rust-proof
- Pre-punched holes for easy installation to wall structure

Loading Capacity Up to
485lbs

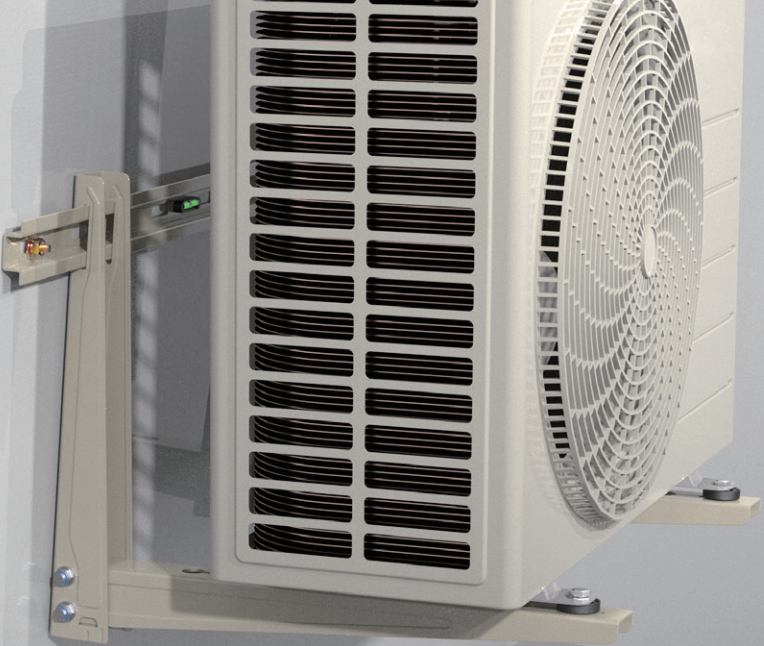

Weather Proof Design



Durable Construction



Secure Protection




Paintable Design



Built-in Level



Vertical Stabilizer

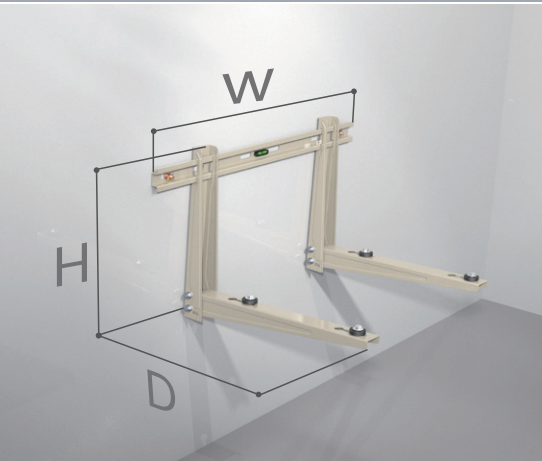

Product Specifications

-Material:	Galvanized Steel
-Sheet Gauge:	14 GA
-Rubber used for isolator:	TPE rubber
-UV Resistant:	Yes
-Powder Coating:	Yes
-Color:	White / Brown / Black

Item Name: N341822B

Model No.	Size: W×H×D(in)	Size: W×H×D(mm)	Thickness	N.W	Max Loading
N341822B	33½×17¾×22	850×450×560	14 GA (1.8mm)	10.8lbs(4.9kg)	485 lbs




- Bracket is designed for masonry wall mount, for stud wall mount proper blocking must be made between studes to ensure proper wall bracing will accommodate bracket weight load.
- The bracket must be securely fixed to wall with all screws fastened tightly.
- Do not make any modification to bracket assembly or fixings



GROUND STAND

Height-adjustable ground stand, elevates outdoor unit to avoid flood, snow and ground corrosion.

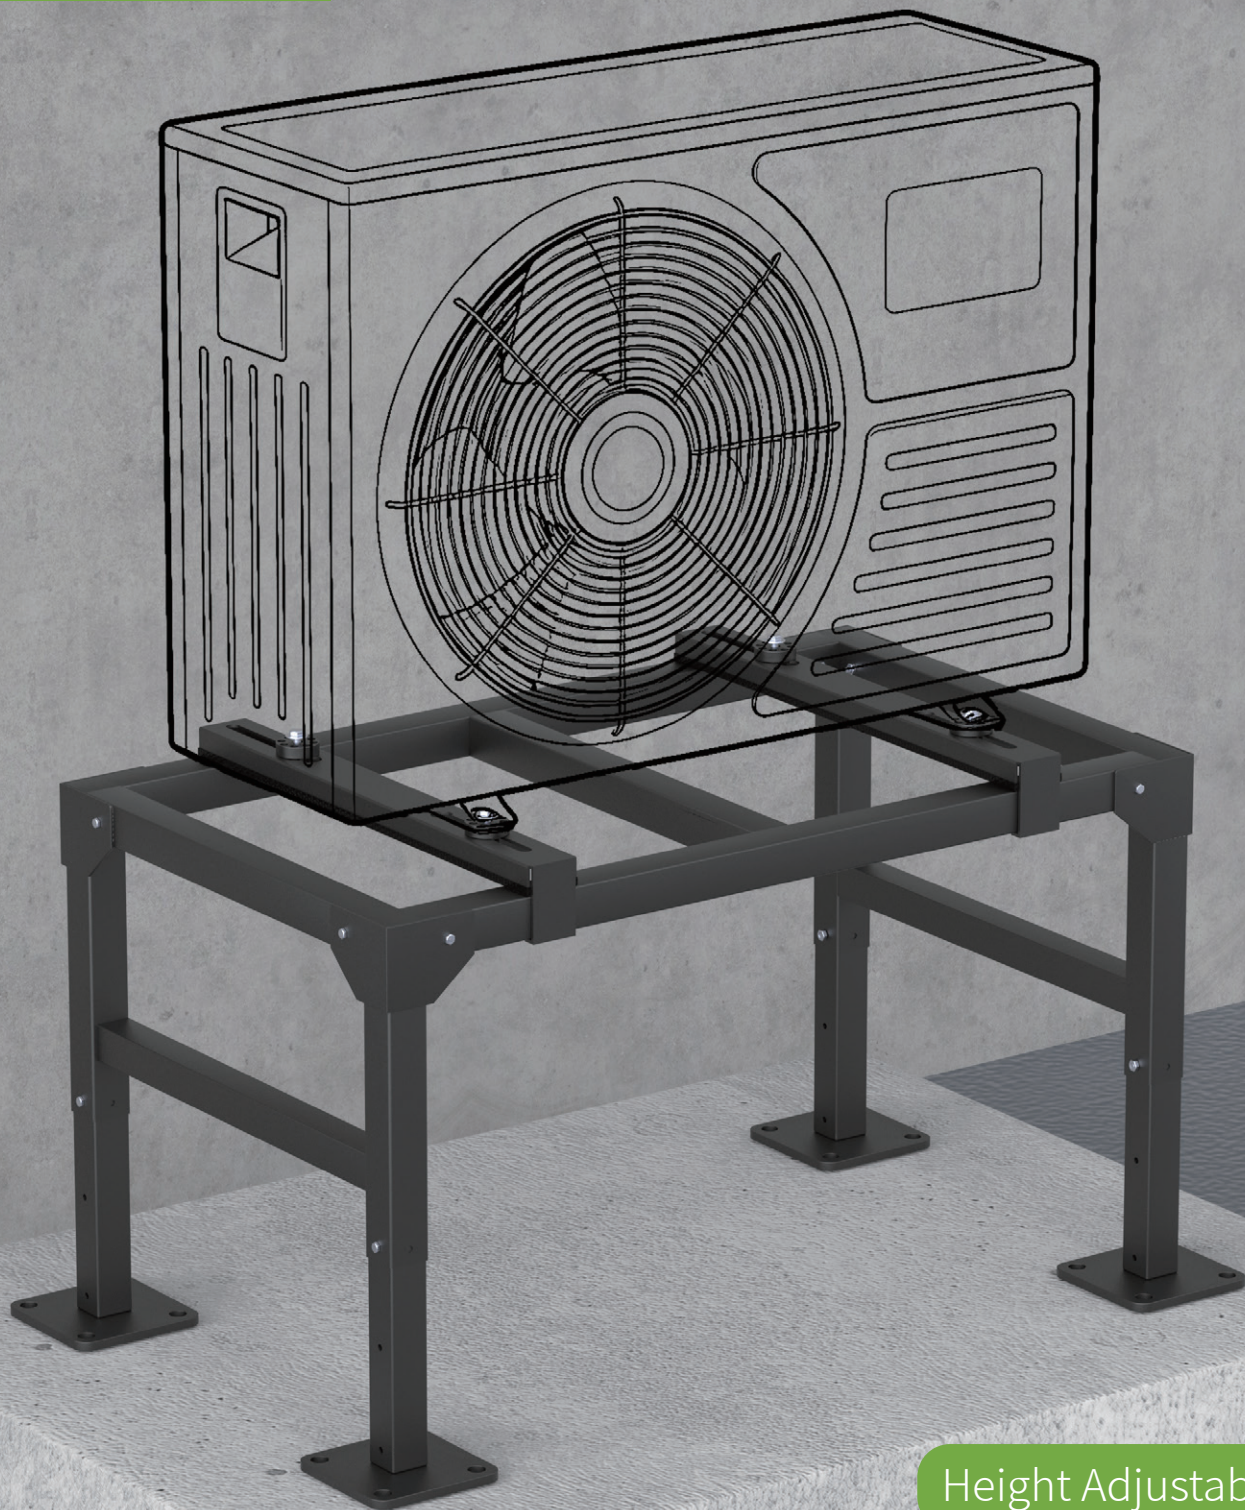

Height Adjustable

Color Available



- Anti-rust coated surface, long service life outdoors
- Raisable height avoids collision with ground obstacles
- Flexible lifting design, convenient for installation & maintenance
- Wide adjustable range, fit various floor space layouts
- Stable height-locking structure, heavy load bearing without shaking
- Elevate outdoor unit to prevent waterlogging and corrosion

Made of premium materials with sturdy build,rust-proof, corrosion-resistant, and not easy to breakage and deform, ensuring long-term use.

This stand raises the condenser to a certain height, keeping out water, snow, dirt, mud, debris, and grass clippings, and effectively prolonging the life of your condenser.

The four legs of the stand are designed with multi-height adjustment positions, enabling flexible adjustment to meet different elevation requirements.



Weather Proof Design



Durable Construction



Secure Protection



Paintable Design



Easy to install




Height Adjustable



High load-bearing Capacity




Not prone to Deformation

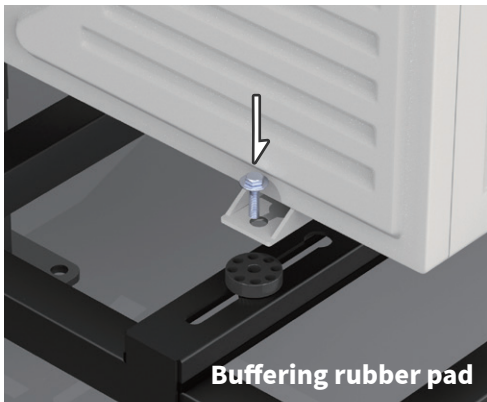


Buffering rubber pad



Loading Capacity Up to 450lbs

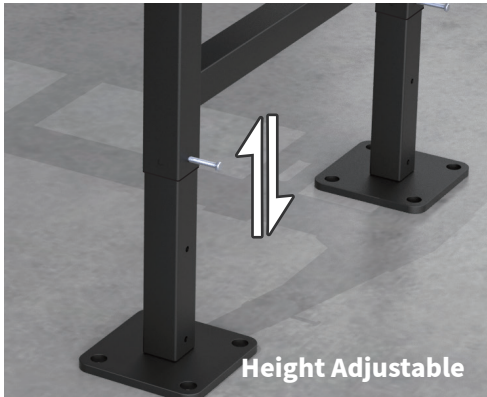

Height Adjustable

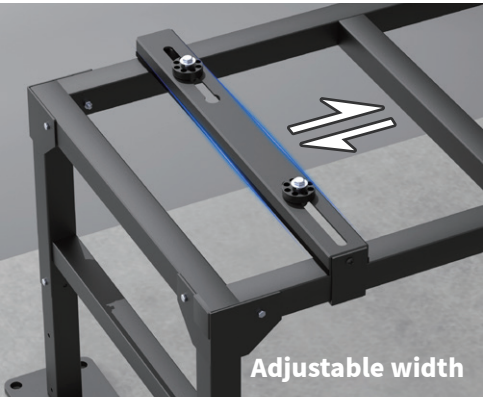

Adjustable width

Specification		
Item	Parameter	
Model	NF301812	NF402012
Material	Galvanized Iron	Galvanized Iron
Color	White / Black	White / Black
Max. Support Weight	400lbs (180kg)	450lbs (200kg)
Product Dimension (L×W×H)	30"×18"×12-1/2" (760mm×460mm×320mm)	40"×20"×12-1/2" (1020mm×510mm×320mm)
Product Net Weight	15.1lbs (6.85kg)	41.8lbs (19kg)
Surface Treatment	White/Black powder coating	White/Black powder coating
Expension Ground Foot Kits for Ground Stand		
Model	NFKIT4	NFKIT4
Quantity	4pcs (1set)	4pcs (1set)
Stand Kit Net Weight	5.5lbs (2.5kg)	5.5lbs (2.5kg)
Product Dimension	4"×4"(100mm×100mm)	4"×4"(100mm×100mm)
Adjustable Height	13" / 17" / 21" (330mm/430mm/530mm)	13" / 17" / 21" (330mm/430mm/530mm)
Product Function	Increases the overall height of the floor-standing bracket	Increases the overall height of the floor-standing bracket



- This ground stand shall be placed on firm, level, compacted load-bearing surface. Installation on loose soil, lawn or uneven ground is prohibited.
- The stand must be firmly assembled with all screws fully tightened.
- Adjust height of four legs and level the stand before placing equipment.

FEATURES

For mini split & central air conditioners and heat pumps

- Weather proof and UV resistant material
- Snap-on design for quick installation
- Alignment tabs on fittings for easy installation
- Protect lineset and tube for mini-splits, and ducted AC systems
- Paintable, stylish, fits any residential or commercial building

Wall Inlet Cover



Extension Joint



90° Flat Elbow



End Cap



90° Elbow Bend



Adjustable Flat Elbow



Adjustable Elbow Bend



Ceiling Cap



T-joint



45° Elbow



Flexible Tube




Straight Duct



DECORATIVE PVC LINESET COVER KIT



-Recommend to sketch a diagram of the desired line set path to determine how much tubing and how many elbows, couplings and other pieces you will need.
-Recommend to follow the Line Set Cover Capacity to ensure a smooth line set run.

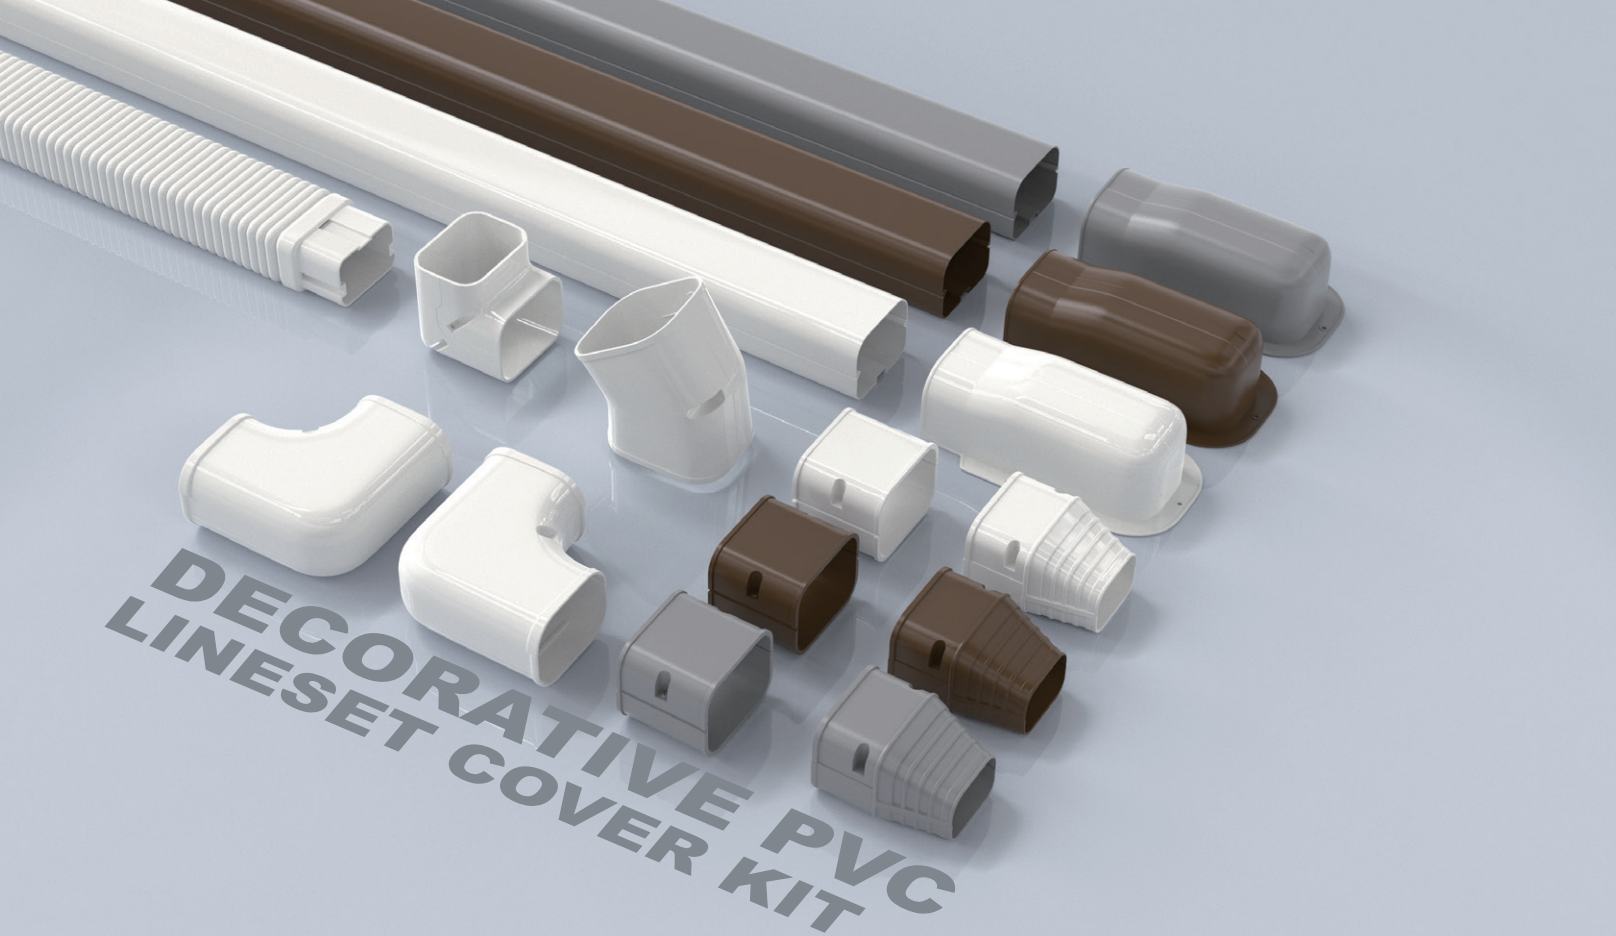

Part List Available in WHITE, BROWN. Size 3", 4", 5"

Specification (3 inch)						
Item	Model Number	Dimension (in.)				
		A	B	C	D	E
Straight Duct	NLC301-1	2-7/8	2-3/8	39-3/8	/	/
	NLC301-2	2-7/8	2-3/8	78-3/4	/	/
	NLC301-3	2-7/8	2-3/8	118-1/8	/	/
Extension Joint	NLC302	3	2-1/2	2-1/2	/	/
Wall Inlet Cover	NLC303	3	2-1/2	7	4-1/4	3-1/8
End Cap	NLC304	2	1-3/8	3-3/4	3	2-1/2
90° Flat Elbow	NLC305	3	2-1/2	5	/	/
90° Elbow Bend	NLC306	3	2-1/2	4	/	/
Flexible Tube	NLC307	3	2-1/2	2	25	/
Ceiling Cap	NLC308	3	2-1/2	3-1/8	4-1/4	5-1/2
45° Elbow	NLC312	3	2-1/2	2-1/8	7/8	/


Specification (4 inch)						
Item	Model Number	Dimension (in.)				
		A	B	C	D	E
Straight Duct	NLC401-1	3-7/8	2-1/2	39-3/8	/	/
	NLC401-2	3-7/8	2-1/2	78-3/4	/	/
	NLC401-3	3-7/8	2-1/2	118-1/8	/	/
Extension Joint	NLC402	4	2-5/8	2	/	/
Wall Inlet Cover	NLC403	4	2-3/4	8-5/8	5-1/4	3-1/4
End Cap	NLC404	3	2-1/2	4-1/4	4	2-3/4
90° Flat Elbow	NLC405	4	2-3/4	5-1/2	/	/
90° Elbow Bend	NLC406	4	2-3/4	4-1/8	/	/
Flexible Tube	NLC407	3-7/8	2-1/2	2-1/4	30	/
T-joint	NLC409	4	2-3/4	6	5-1/2	/
Adjustable Flat Elbow	NLC410	4	2-3/4	6-3/4	/	/
Adjustable Elbow Bend	NLC411	4	2-3/4	5-1/2	/	/

Specification (5 inch)						
Item	Model Number	Dimension (in.)				
		A	B	C	D	E
Straight Duct	NLC501-1	4-7/8	3-3/8	39-3/8	/	/
	NLC501-2	4-7/8	3-3/8	78-3/4	/	/
	NLC501-3	4-7/8	3-3/8	118-1/8	/	/
Extension Joint	NLC502	5-1/4	3-1/2	3-1/8	/	/
Wall Inlet Cover	NLC503	5	3-5/8	9-1/4	6-5/8	4-3/4
90° Flat Elbow	NLC505	5-1/8	3-1/2	6-7/8	/	/
90° Elbow Bend	NLC506	5	3-5/8	6-3/4	/	/
Flexible Tube	NLC507	4-7/8	3-1/2	3	30-3/4	/
T-joint	NLC509	5-1/4	3-1/2	8-1/8	6-3/4	/

Note: 3inch, 4inch and 5inch added on the pictures, means those parts have corresponding specifications.

3 inch Line Set Cover

BTU - 12,000




Suction Line - 1/2" OD
(Insulation) - 3/8"

Liquid Line - 1/4" OD
(Insulation) - 3/8"

Drain Hose - 3/4" PVC

BTU - 24,000




Suction Line - 1/2" OD
(Insulation) - 3/8"

Liquid Line - 1/4" OD
(Insulation) - 3/8"

Drain Hose - 3/4" PVC

4 inch Line Set Cover

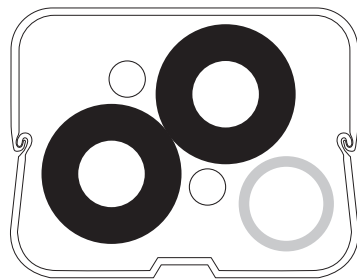

BTU - 36,000

2 X Suction Line - 3/4" OD
(Insulation) - 3/8"

2 X Liquid Line - 3/8" OD

Drain Hose - 3/4" PVC




BTU - 42,000

Suction Line - 3/4" OD
(Insulation) - 1/2"

Liquid Line - 3/8" OD
(Insulation) - 1/2"

Drain Hose - 7/8" PVC

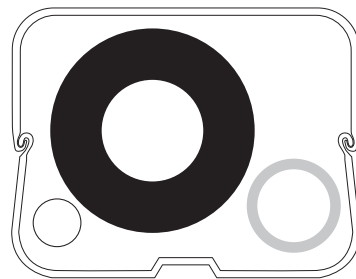


BTU - 60,000

Suction Line - 1-1/8" OD
(Insulation) - 1/2"

Liquid Line - 1/2" OD

Drain Hose - 3/4" PVC

5 inch Line Set Cover

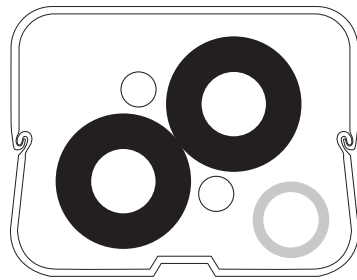


BTU - 36,000

2 X Suction Line - 3/4" OD
(Insulation) - 3/8"

2 X Liquid Line - 3/8" OD

Drain Hose - 3/4" PVC

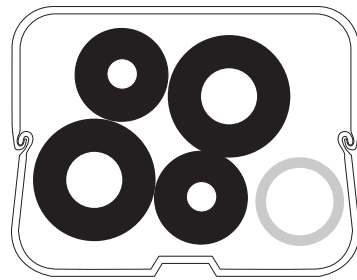


BTU - 42,000

2 X Suction Line - 3/4" OD
(Insulation) - 1/2"

2 X Liquid Line - 3/8" OD
(Insulation) - 1/2"

Drain Hose - 7/8" PVC

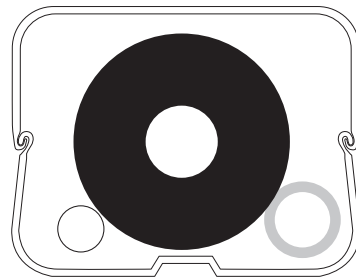

BTU - 60,000

Suction Line - 1-1/8" OD
(Insulation) - 1"

Liquid Line - 1/2" OD

Drain Hose - 3/4" PVC



-Recommend to sketch a diagram of the desired line set path to determine how much tubing and how many elbows ,couplings and other pieces you will need.
-Recommend to follow the Line Set Cover Capacity to ensure a smooth line set run.



Combinations

- Packed with selected line set covers and connection parts
- Customized combinations available upon request


3"W x 14Ft Combinations: NLC-COM314



Parts List

39-3/8in Straight Duct	x 4
Extension Joint	x 3
End Cap	x 1
Wall Inlet Cover	x 1
90° Flat Elbow	x 1
90° Elbow Bend	x 1
Flexible Tube	x 1

4"W x 14Ft Combinations: NLC-COM414

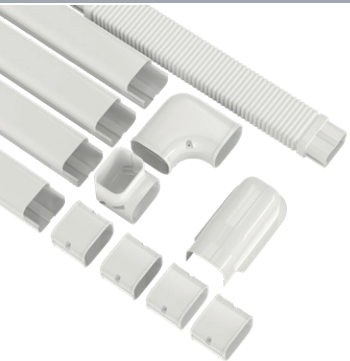


Parts List

39-3/8in Straight Duct	x 4
Extension Joint	x 4
Wall Inlet Cover	x 1
90° Flat Elbow	x 1
90° Elbow Bend	x 1
Flexible Tube	x 1






-Recommend to sketch a diagram of the desired line set path to determine how much tubing and how many elbows ,couplings and other pieces you will need.
-Recommend to follow the Line Set Cover Capacity to ensure a smooth line set run.

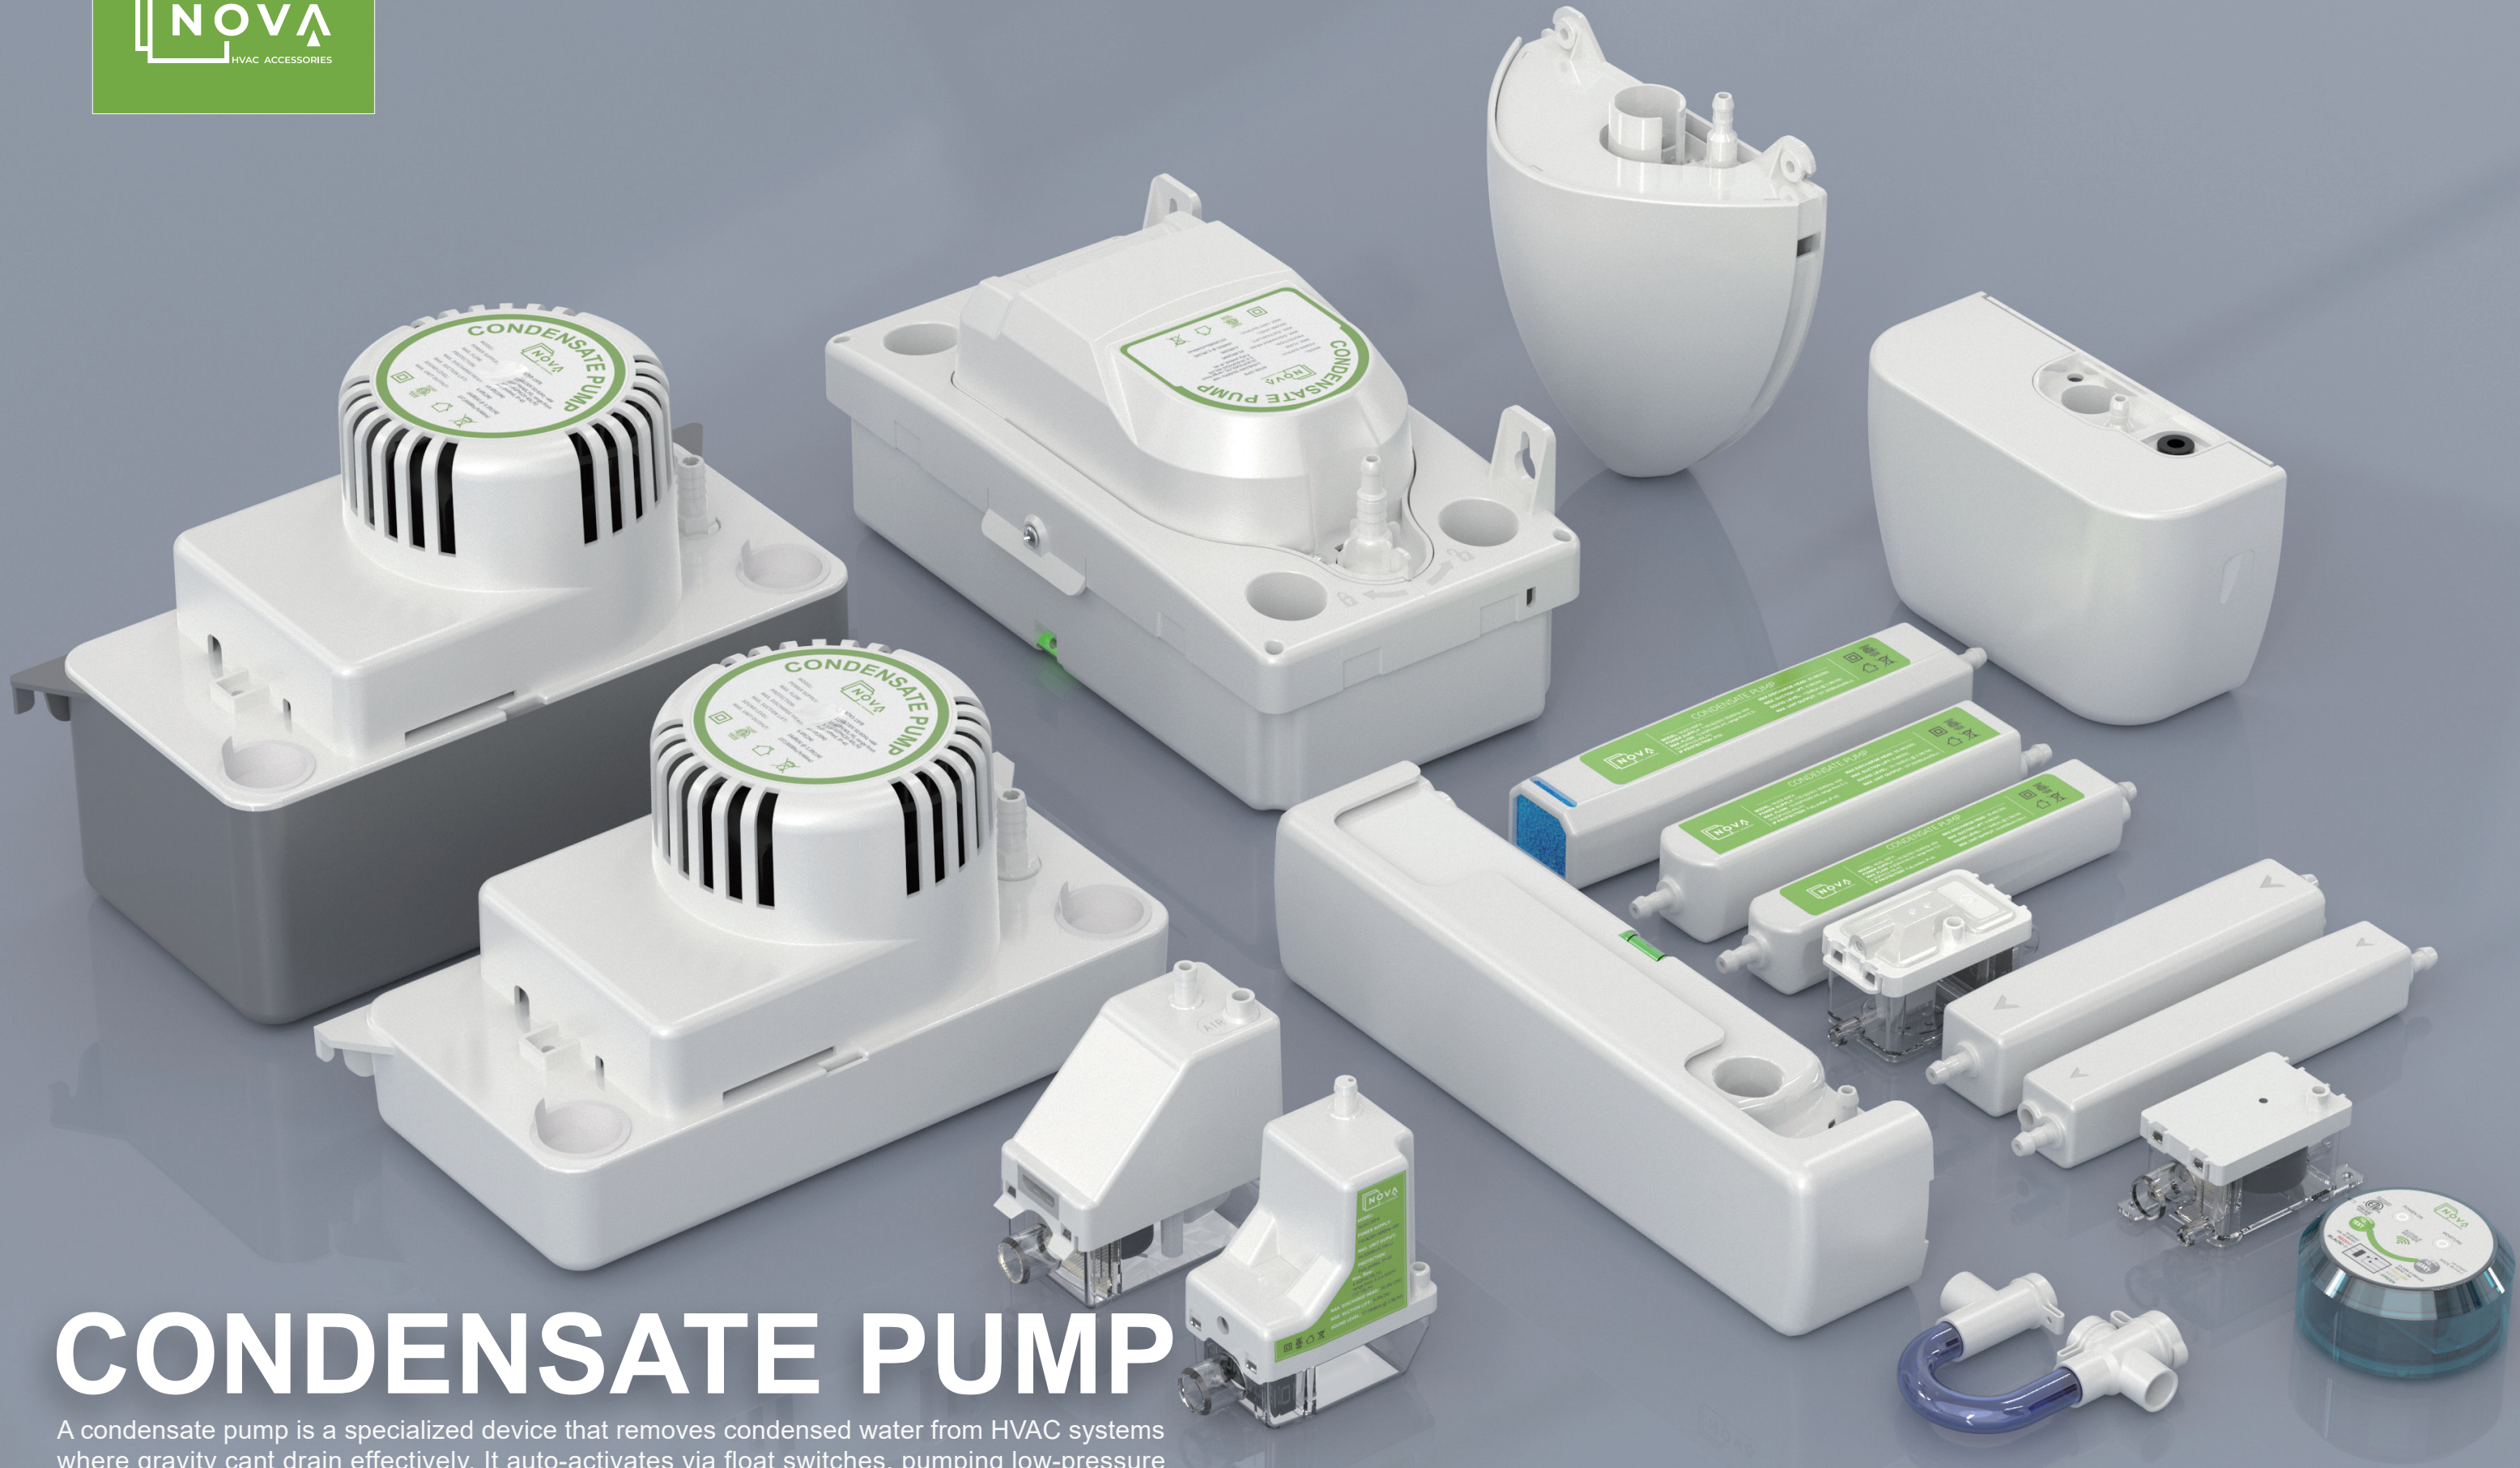

CONDENSATE PUMP

A condensate pump is a specialized device that removes condensed water from HVAC systems where gravity can't drain effectively. It auto-activates via float switches, pumping low-pressure condensate to drains/tanks by overcoming elevation/resistance. Compact and durable, it prevents backup, corrosion, or leaks, with safety features like overflow protection to ensure HVAC systems run efficiently across residential, commercial and industrial settings.

The condensate draining pump (tank pump big and tank pump small) is able to drain huge volume of condensation. It is easy to install and suitable for installations in all spaces. Standard color is white and gray, customized color is optional. There are four models for each voltage, max. discharge head range from 15ft to 24ft.

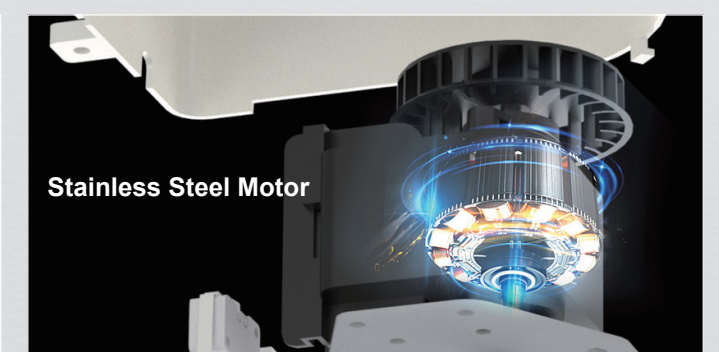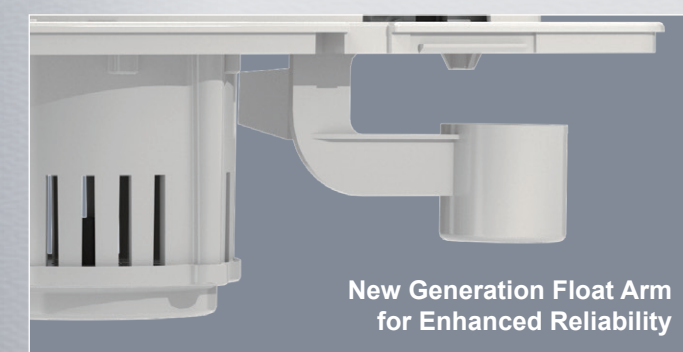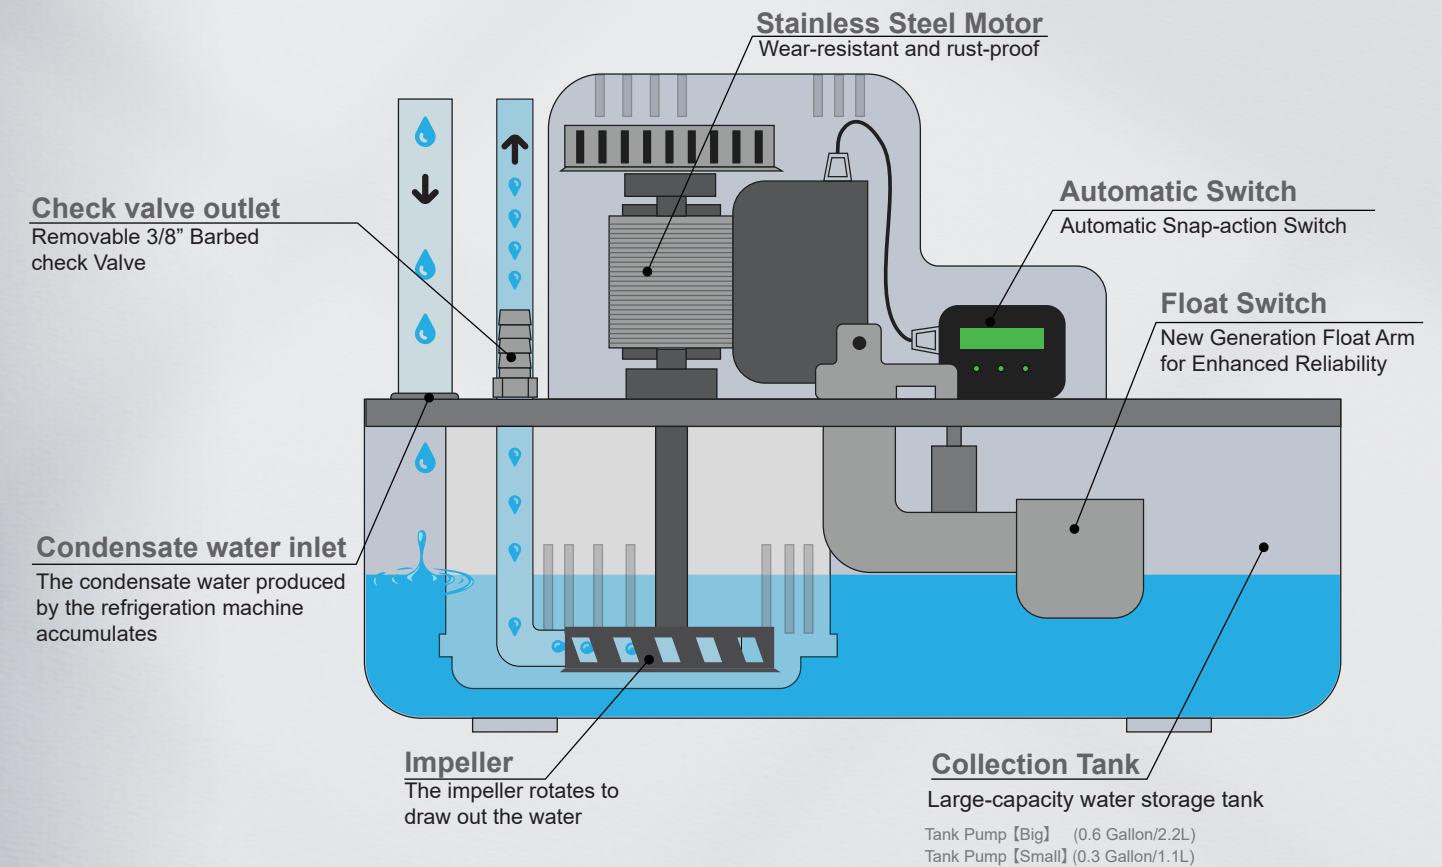

TANK PUMP [BIG/SMALL] Rustproof



Max. Flow 66~153GPH (250~580L/H)



Sound level 30~40dB(A) @ 3.3ft (1M)




Max. discharge head 15~24ft (4.6~7.3M)


Max. discharge head




15ft (4.6M)

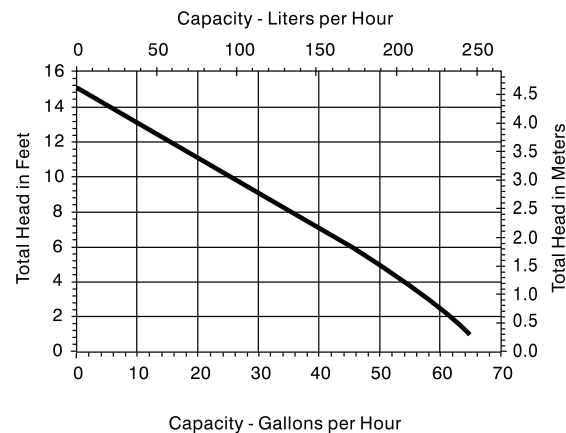


20ft (6.1M)

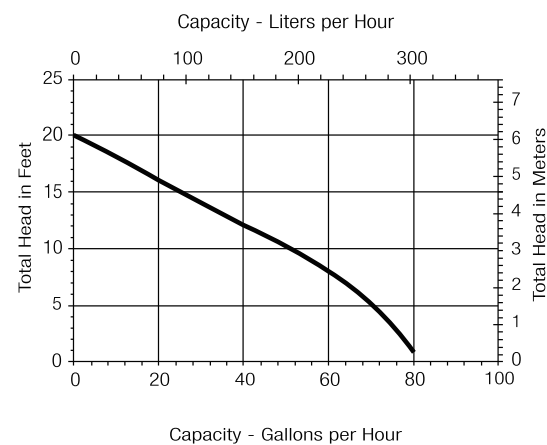

22ft (6.7M)

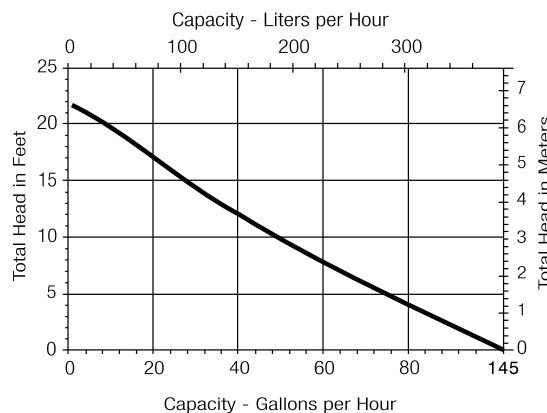

24ft (7.3M)

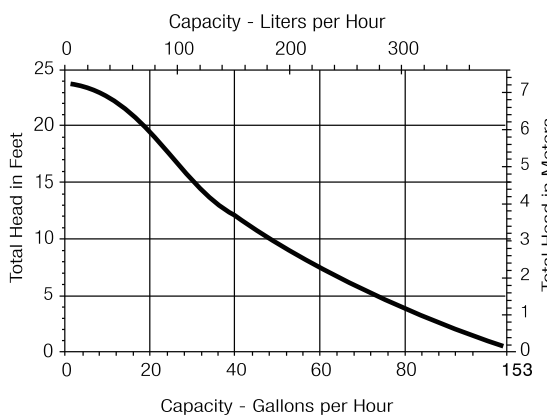


24ft (7.3M)
153GPH (580L/H)

22ft (6.7M)
145GPH (550L/H)

20ft (6.1M)
80GPH (303L/H)

15ft (4.6M)
66GPH (250L/H)

Average
Performance

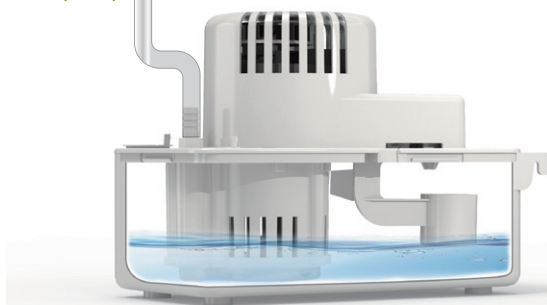

Tank Pump 【Big】



Model	NTKB-15FB	NTKB-20FB	NTKB-22FB	NTKB-24FB
Power supply	115V/60Hz	115V/60Hz	115V/60Hz	115V/60Hz
Tank capacity	0.6 Gallon/2.2L	0.6 Gallon/2.2L	0.6 Gallon/2.2L	0.6 Gallon/2.2L
Current	1.0A	1.5A	1.85A	2.2A
Power	60W	85W	100W	110W
Max. flow	66GPH (250L/H)	80GPH (303L/H)	145GPH (550L/H)	153GPH (580L/H)
Sound level	30dB(A) @ 3.3ft(1M)	35dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)
Max. discharge head	15ft (4.6M)	20ft (6.1M)	22ft (6.7M)	24ft (7.3M)
Safety switch	3A	3A	3A	3A
Max. water temperature	140°F(60°C)	140°F(60°C)	140°F(60°C)	140°F(60°C)
Discharge tube	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"
Class	I	I	I	I
IP Protection	IPX2	IPX2	IPX2	IPX2
LxWxH	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm

Model	NTKB-15FM	NTKB-20FM	NTKB-22FM	NTKB-24FM
Power supply	230V/60Hz	230V/60Hz	230V/60Hz	230V/60Hz
Tank capacity	0.6 Gallon/2.2L	0.6 Gallon/2.2L	0.6 Gallon/2.2L	0.6 Gallon/2.2L
Current	0.45A	0.55A	1.0A	1.1A
Power	50W	75W	100W	110W
Max. flow	66GPH (250L/H)	80GPH (303L/H)	145GPH (550L/H)	153GPH (580L/H)
Sound level	30dB(A) @ 3.3ft(1M)	35dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)
Max. discharge head	15ft (4.6M)	20ft (6.1M)	22ft (6.7M)	24ft (7.3M)
Safety switch	3A	3A	3A	3A
Max. water temperature	140°F(60°C)	140°F(60°C)	140°F(60°C)	140°F(60°C)
Discharge tube	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"
Class	I	I	I	I
IP Protection	IPX2	IPX2	IPX2	IPX2
LxWxH	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm	11-1/8" × 5-1/8" × 7-1/8" 284mm × 129mm × 182mm

Tank Pump 【Small】



Model	NTKS-15FB	NTKS-20FB	NTKS-22FB	NTKS-24FB
Power supply	115V/60Hz	115V/60Hz	115V/60Hz	115V/60Hz
Tank capacity	0.3 Gallon/1.1L	0.3 Gallon/1.1L	0.3 Gallon/1.1L	0.3 Gallon/1.1L
Current	1.0A	1.5A	1.85A	2.2A
Power	60W	85W	100W	110W
Max. flow	66GPH (250L/H)	80GPH (303L/H)	145GPH (550L/H)	153GPH (580L/H)
Sound level	30dB(A) @ 3.3ft(1M)	35dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)
Max. discharge head	15ft (4.6M)	20ft (6.1M)	22ft (6.7M)	24ft (7.3M)
Safety switch	3A	3A	3A	3A
Max. water temperature	140°F(60°C)	140°F(60°C)	140°F(60°C)	140°F(60°C)
Discharge tube	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"
Class	I	I	I	I
IP Protection	IPX2	IPX2	IPX2	IPX2
LxWxH	11" × 5" × 5-3/8" 278mm × 127mm × 135mm	11" × 5" × 5-3/8" 278mm × 127mm × 135mm	11" × 5" × 5-3/8" 278mm × 127mm × 135mm	11" × 5" × 5-3/8" 278mm × 127mm × 135mm

Model	NTKS-15FM	NTKS-20FM	NTKS-22FM	NTKS-24FM
Power supply	230V/60Hz	230V/60Hz	230V/60Hz	230V/60Hz
Tank capacity	0.3 Gallon/1.1L	0.3 Gallon/1.1L	0.3 Gallon/1.1L	0.3 Gallon/1.1L
Current	0.45A	0.55A	1.0A	1.1A
Power	50W	75W	100W	110W
Max. flow	66GPH (250L/H)	80GPH (303L/H)	145GPH (550L/H)	153GPH (580L/H)
Sound level	30dB(A) @ 3.3ft(1M)	35dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)	40dB(A) @ 3.3ft(1M)
Max. discharge head	15ft (4.6M)	20ft (6.1M)	22ft (6.7M)	24ft (7.3M)
Safety switch	3A	3A	3A	3A
Max. water temperature	140°F(60°C)	140°F(60°C)	140°F(60°C)	140°F(60°C)
Discharge tube	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"	1/4"×3/8"
Class	I	I	I	I
IP Protection	IPX2	IPX2	IPX2	IPX2
LxWxH	11" × 5" × 5-3/8" 278mm × 127mm × 135mm	11" × 5" × 5-3/8" 278mm × 127mm × 135mm	11" × 5" × 5-3/8" 278mm × 127mm × 135mm	11" × 5" × 5-3/8" 278mm × 127mm × 135mm

TANK PUMP PLUS

CONDENSATE PUMP

- Automatic Optical-level Sensor Switch
- 0.46 Gallon Rustproof, High Impact ABS Tank
- Discharge tube compatible with both 3/8" & 1/4"
- Optional dual alarm system for enhanced safety and reliability
- 6-feet power cord
- 4 inlets 1.1"


- Max. flow **155GPH(587L/H)**
- Sound level **30dB(A)@ 3.3ft (1M)**
- Max. discharge head **24ft (7.2M)**




Tank Pump Plus uses photoelectric switch technology to replace the traditional micro switch. The service life of the switch is greatly increased. Tank Pump Plus is driven by a brushless DC motor, which has significant advantages over traditional AC motors, such as large flow, low noise, low energy consumption, and ultra-long service life.

TYPICAL PERFORMANCE <

1/4"(6MM) FLOW CURVE

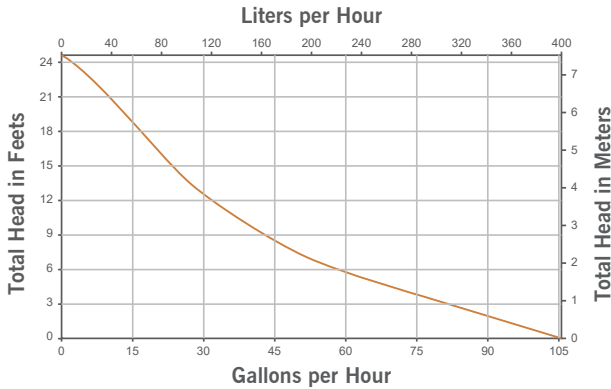


3/8"(10MM) FLOW CURVE

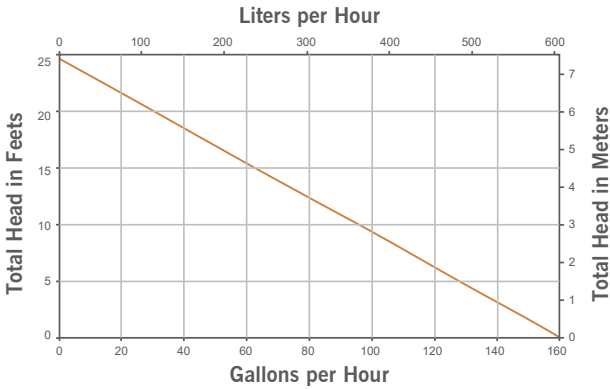

>TECHNICAL DATA

Model	NTKP-24FA
Power supply	115V&230V 50/60Hz
Power	50W
Max. flow	155GPH(587L/H)
Sound level	30dB(A) @ 3.3ft(1M)
Max. discharge head	24ft(7.2M)
Max. suction lift	/
Max. unit output	/
Safety switch	/
Max. water temperature	140°F(60°C)
Discharge tube	3/8in(10mm) & 1/4in(6mm) ID
Class	II appliance
Rated	Continuous
IP Protection	IP24
L×W×H	11" × 5-3/4" × 5-1/8" 280mm × 146mm × 129mm

DIMENSION <

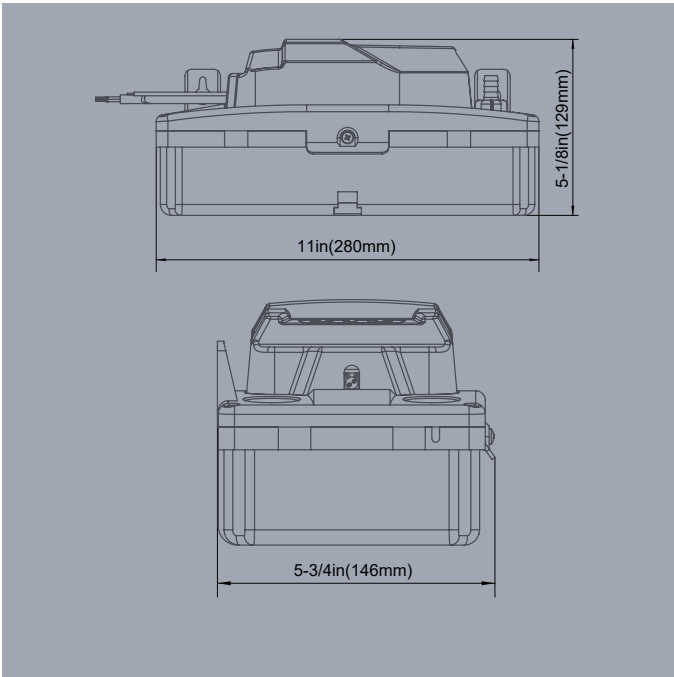

TANK PUMP MIDDLE

CONDENSATE PUMP


- Lower chamber design to minimize mold growth and extend the float switch travel
- Optional dual alarm system for enhanced safety and reliability
- Discharge tube compatible with both 3/8" & 1/4"
- 3 LED Indicator for Operational Status
- 0.45 Gallon Rustproof, High Impact ABS Tank
- 4 inlets 1.1"

- Max. flow **122GPH (460L/H)**
- Sound level **35dB(A) @ 3.3ft(1M)**
- Max. discharge head **20ft (6.1M)**




115V

1/4"(6MM) FLOW CURVE

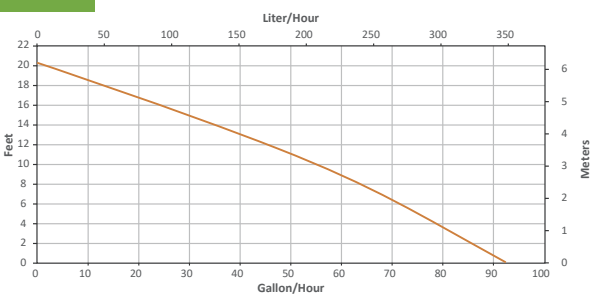


3/8"(10MM) FLOW CURVE

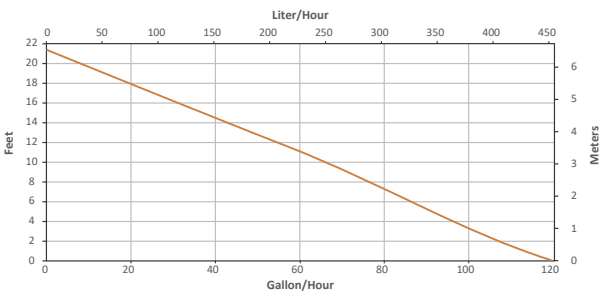


230V

1/4"(6MM) FLOW CURVE

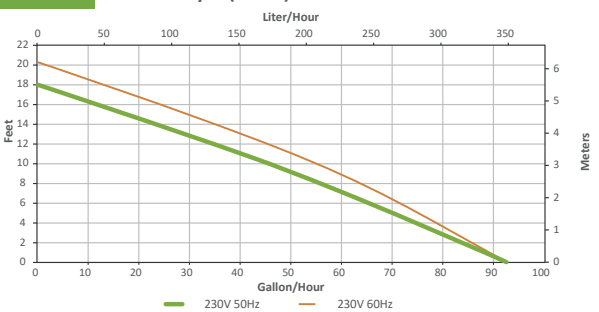


3/8"(10MM) FLOW CURVE

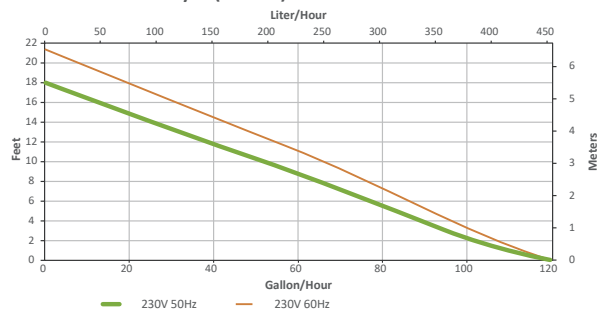

>TECHNICAL DATA

Model	NTKM-20FB	NTKM-20FM
Power supply	115V/60Hz	230V/60Hz
Tank capacity	0.45 Gallon/1.7L	0.45 Gallon/1.7L
Current	1.4A	0.7A
Power	75W	75W
Max. flow	122GPH (460L/H)	122GPH (460L/H)
Sound level	35dB(A) @ 3.3ft(1M)	35dB(A) @ 3.3ft(1M)
Max. discharge head	20ft (6.1M)	20ft (6.1M)
Safety switch	3A	3A
Max. water temperature	140°F(60°C)	140°F(60°C)
Discharge tube	3/8in(10mm) & 1/4in(6mm) ID	3/8in(10mm) & 1/4in(6mm) ID
Class	I	I
IP Protection	IP24	IP24
LxWxH	11" × 5-5/8" × 5-3/8" 280mm × 143mm × 138mm	11" × 5-5/8" × 5-3/8" 280mm × 143mm × 138mm

DIMENSION <

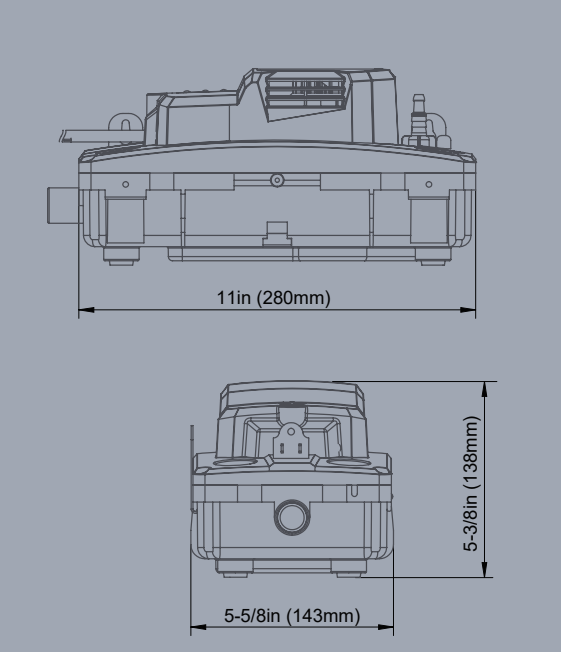

AQUAFLOW HEART

CONDENSATE PUMP



- High Performance
- Plug & Play
- Anti-vibration
- Quiet Operation
- Quick and simple installation


- Max flow **10.6GPH (40L/H)**
- Sound level **20dB(A)@ 3.3ft (1M)**
- Max. discharge head **65.6ft (20M)**





TECHNICAL DATA

TYPICAL PERFORMANCE <

Model	NAFH-65FA
Power supply	115V&230V 50/60Hz
Power	<4W
Max. flow	10.6GPH(40L/H) @ 0 head
Sound level	20dB(A) @ 3.3ft(1M)
Max. discharge head	65.6ft(20M)
Water Storage	300ml
Max. suction lift	6.6ft(2M)
Max. unit output	157,000Btu/h(46kw)
Safety switch	3A Normally closed
Max. water temperature	158°F(70°C)
Discharge tube	1/4in(6mm) ID
Class	II appliance ☐
Rated	Continuous
IP Protection	IPX5
L×W×H	6-3/4" × 3-1/4" × 6-3/4" 171mm × 83mm × 172mm

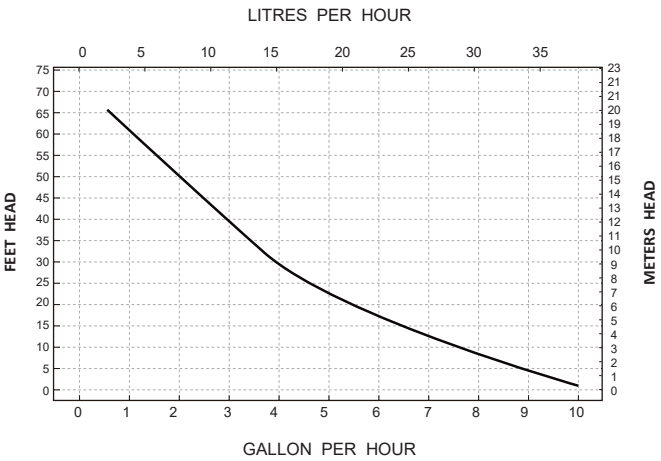

DIMENSION <

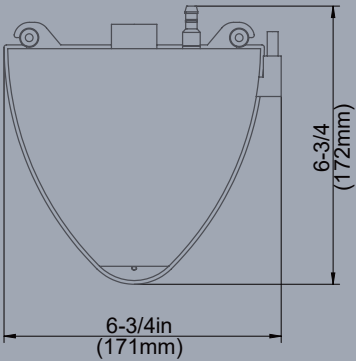

AQUAFLOW WEDGE

CONDENSATE PUMP



- Float Switch Detection
- High performance
- Simple and quick to install
- Anti-vibration
- Silent Operation

- Max flow **10.6GPH(40L/H) @ 0 head**
- Sound level **20dB(A) @ 3.3ft(1M)**
- Max. discharge head **65.6ft(20M)**




The sleek, compact design of the AquaFlow series pumps makes them ideal for integration with mini-split and ducted HVAC systems. Operating via float switch mechanism, AquaFlow series delivers exceptional condensate removal performance while maintaining whisper-quiet operation, ensuring optimal environmental comfort.



TECHNICAL DATA

TYPICAL PERFORMANCE <

Model	NAFW-65FA
Power supply	115V&230V 50/60Hz
Power	<4W
Max. flow	10.6GPH(40L/H) @ 0 head
Sound level	20dB(A) @ 3.3ft(1M)
Max. discharge head	65.6ft(20M)
Water Storage	230ml
Max. suction lift	6.6ft(2M)
Max. unit output	157,000Btu/h(46kw)
Safety switch	3A Normally closed
Max. water temperature	158°F(70°C)
Discharge tube	1/4in(6mm) ID
Class	II appliance ☐
Rated	Continuous
IP Protection	Fully potted, IPX5
L×W×H	6-1/2" × 2-3/4" × 4-1/8" 164mm × 70mm × 106mm

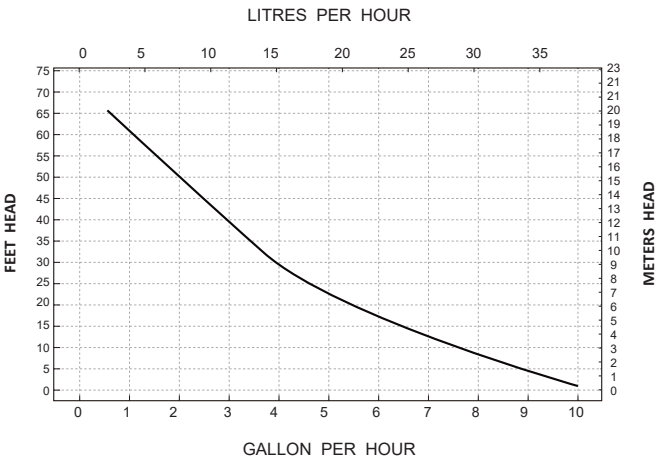

DIMENSION <

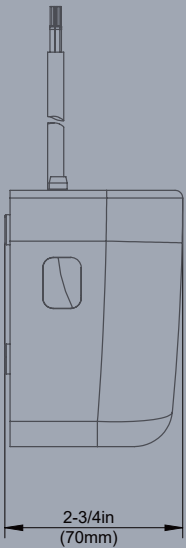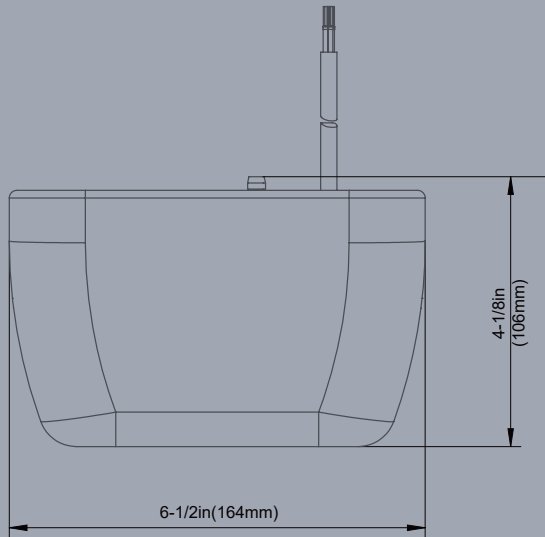

AQUAFLOW RECTO

CONDENSATE PUMP



- Capacitive sensor
- Variable flow rate
- Diagnostic LED
- Quick and simple installation
- Built-in operation tracking
- Ultra-quiet operation
- Up to 157,000 Btu/h / 46 kw

- Max flow **10.6GPH (40L/H)**
- Sound level **16dB(A)@ 3.3ft (1M)**
- Max. discharge head **65.6ft (20M)**




The Aquaflow Recto features a capacitive sensor for water detection, enhancing reliability over traditional float switches. Its soft-start mode minimizes startup noise and extends the lifespan of the pump and electronic components. A built-in counter tracks operating time and provides alarm notifications for optimal maintenance.

> TECHNICAL DATA

TYPICAL PERFORMANCE <


Model	NAFR-65FA
Power supply	115V&230V 50/60Hz
Power	<4W
Max. flow	10.6GPH(40L/H), range from 5.3-10.6GPH(20-40L/H)
Sound level	16dB(A) @ 3.3ft(1M)
Max. discharge head	65.6ft(20M)
Max. suction lift	6.6ft(2M)
Max. unit output	157,000Btu/h(46kw)
Safety switch	3A Normally closed
Max. water temperature	104°F(40°C)
Discharge tube	1/4in(6mm) ID
Class	II appliance
Rated	Continuous
IP Protection	Fully potted, IP-45
L×W×H	11-1/8" × 2-1/8" × 2-3/4" 281mm × 55mm × 69mm

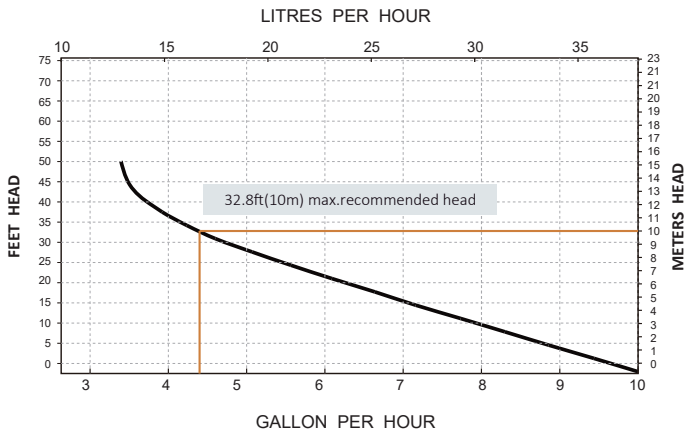

> IN THE BOX

- 1A fuse **×1**
- Installation screw **×2**
- Expansion plug **×2**
- Level gauge **×1**
- Connection clamp **×1**
- Nylon clamps 200mm×4mm **×2**
- Drilling schematic template **×1**
- Anti-siphon valve **×1**

DIMENSION <

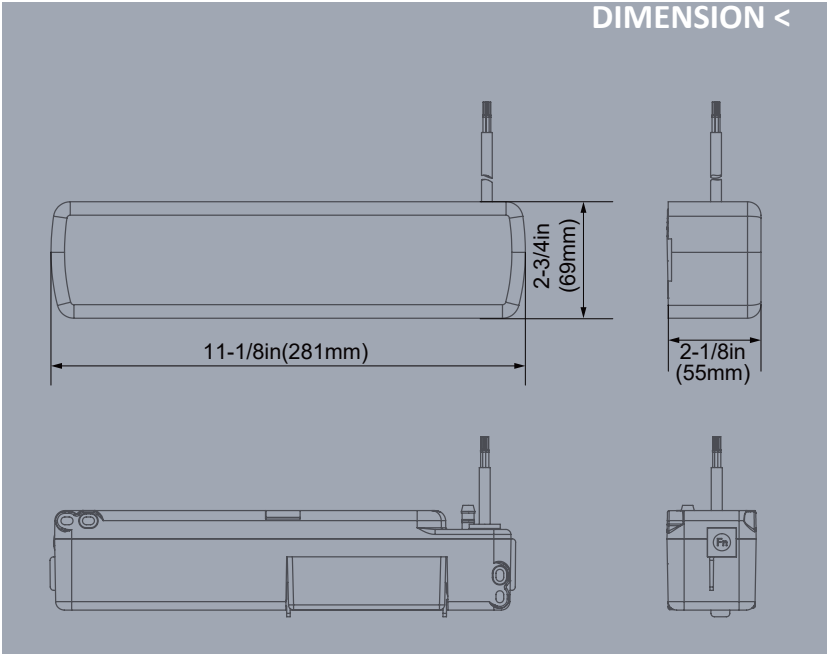

UNSEEN DEEPSEA

CONDENSATE PUMP



- Capacitive sensor
- Variable flow rate
- Diagnostic LED
- Submersible in Condensate Pans
- Built-in operation tracking
- Ultra-quiet operation
- Up to 157,000 Btu/h / 46 kw

- Max flow **10.6GPH (40L/H)**
- Sound level **19dB(A) @ 3.3ft(1M)**
- Max. discharge head **65.6ft (20M)**




The Unseen Deepsea features a capacitive sensor for water detection, enhancing reliability over traditional float switches. Its soft-start mode minimizes startup noise and extends the lifespan of the pump and electronic components. Completely-sealed design with IP68 protection grade makes Unseen Deepsea submersible in condensate trays/pans, with high pumping capacity.

TECHNICAL DATA

TYPICAL PERFORMANCE <


Model	NUSD-65FA
Power supply	115V&230V 50/60Hz
Power	<4W
Max. flow	10.6GPH(40L/H), range from 5.3-10.6GPH(20-40L/H)
Sound level	19dB(A) @ 3.3ft(1M)
Max. discharge head	65.6ft(20M)
Max. suction lift	6.6ft(2M)
Max. unit output	157,000Btu/h(46kw)
Safety switch	3A Normally closed
Max. water temperature	104°F(40°C)
Discharge tube	1/4in(6mm) ID
Class	II appliance
Rated	Continuous
IP Protection	IP68
L×W×H	6-7/8" × 1-3/8" × 1-5/8" 176mm × 34mm × 41mm

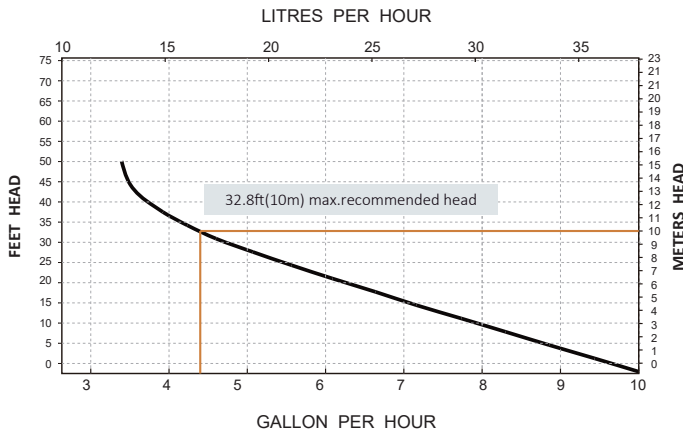

> IN THE BOX

- Assembled Unseen Deepsea
- 1.5m length of 6mm i/d vinyl tube
- Power cable
- 1A fuse
- Anti-siphon valve
- Check valve
- Nylon clamps 4×200mm×4mm

DIMENSION <

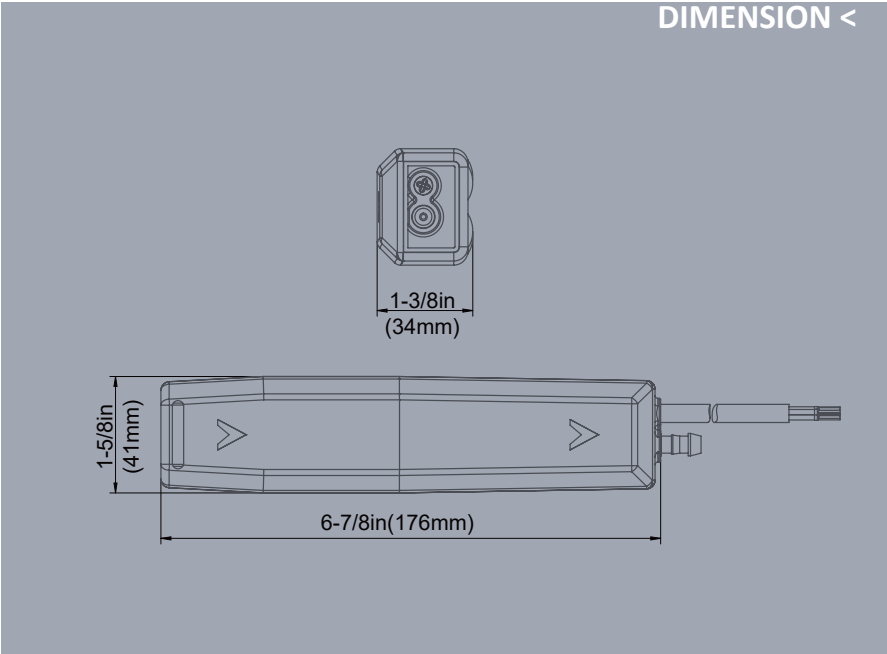

UNSEEN LINEAR

CONDENSATE PUMP



- Capacitive sensor
- Variable flow rate
- Diagnostic LED
- Slim design for easy installation
- Built-in operation tracking
- Ultra-quiet operation
- Up to 54,600 Btu/h / 16 kw

- Max flow **4.8GPH (18L/H)**
- Sound level **17-19dB(A) @ 3.3ft(1M)**
- Max. discharge head **39.4ft(12M)**




The Unseen Linear features a capacitive sensor for water detection, enhancing reliability over traditional float switches. Its soft-start mode minimizes startup noise and extends the lifespan of the pump and electronic components. A built-in counter tracks operating time and provides alarm notifications for optimal maintenance.

> TECHNICAL DATA

Model	NUSL-39FA
Power supply	115V&230V 50/60Hz
Power	<4W
Max. flow	4.8GPH(18L/H), range from 3.2-4.8GPH(12-18L/H)
Sound level	17-19dB(A) @ 3.3ft(1M)
Max. discharge head	39.4ft(12M)
Max. suction lift	6.6ft(2M)
Max. unit output	54,600Btu/h(16kw)
Safety switch	3A Normally closed
Max. water temperature	104°F(40°C)
Discharge tube	1/4in(6mm) ID
Class	II appliance ☒
Rated	Continuous
IP Protection	Fully potted, IP-45
L×W×H	7-3/8" × 1-1/8" × 1-1/8" 187mm × 29mm × 29mm


TYPICAL PERFORMANCE <

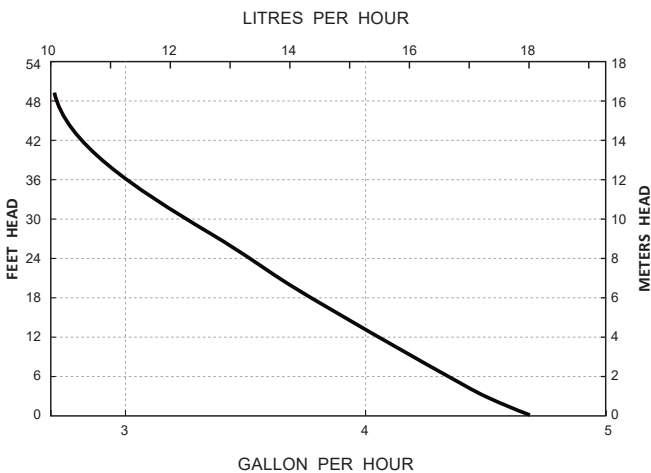

> IN THE BOX

- Assembled Unseen Linear
- Assembled inline
- Plug connector
- 1.5m length of 6mm i/d vinyl tube
- Silicone tube 15cm
- Power cable
- 1A fuse
- Anti-siphon valve
- Check valve
- 3M tape 2×50mm×20mm×1mm
- 3M tape 1×50mm×20mm×2.5mm
- Nylon clamps 4×200mm×4mm

DIMENSION <

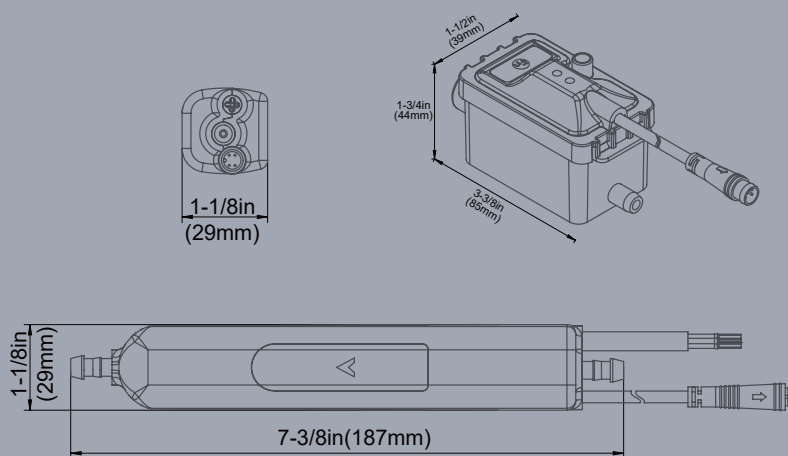


UNSEEN LINEAR-F

CONDENSATE PUMP



- Float Switch Detection
- Plug & Play
- Slim design to fit various installation methods
- Anti-vibration
- Silent Operation

- Max flow **4GPH(15L/H) @ 0 head**
- Sound level **19dB(A) @ 3.3ft(1M)**
- Max. discharge head **39.4ft(12M)**

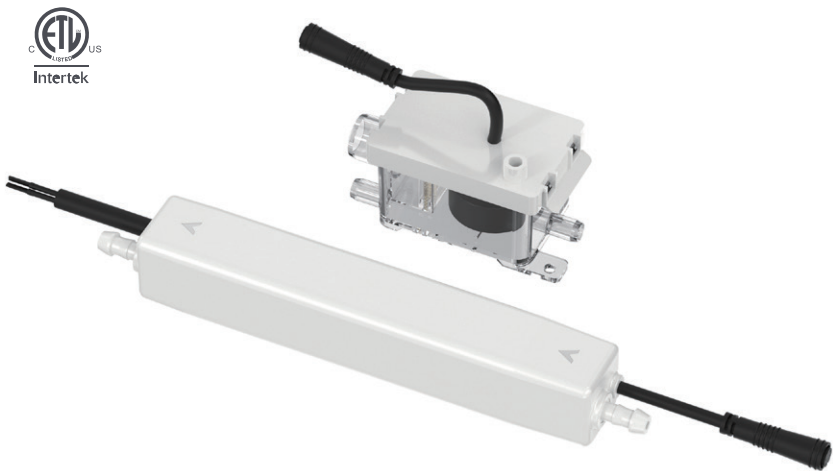


The sleek, compact design of the Unseen series pumps makes them ideal for integration with mini-split and ducted HVAC systems. Operating via float switch mechanism, Unseen series delivers exceptional condensate removal performance while maintaining whisper-quiet operation, ensuring optimal environmental comfort.

TECHNICAL DATA

Model	NUSL-39FA-F
Power supply	115V&230V 50/60Hz
Power	<4W
Max. flow	4GPH(15L/H) @ 0 head
Sound level	19dB(A) @ 3.3ft(1M)
Max. discharge head	39.4ft(12M)
Water Storage	40ml
Max. suction lift	6.6ft(2M)
Max. unit output	95,550Btu/h(28kw)
Safety switch	3A Normally closed
Max. water temperature	158°F(70°C)
Discharge tube	1/4in(6mm) ID
Class	II appliance ☒
Rated	Continuous
IP Protection	IPX5
L×W×H	7-3/8" × 1-1/8" × 1-1/8" 187mm × 29mm × 27mm


TYPICAL PERFORMANCE <

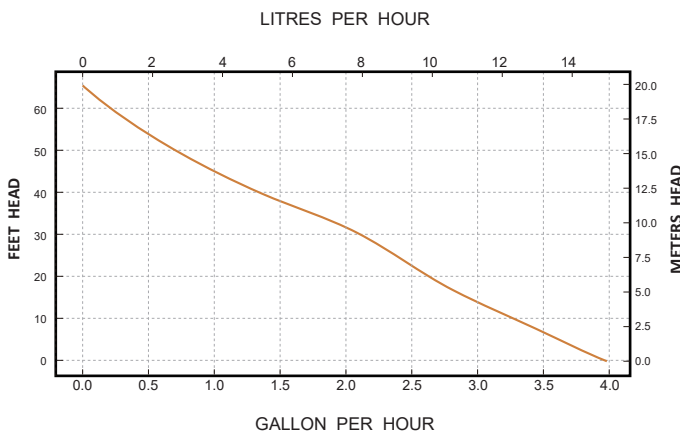

> IN THE BOX

- Assembled Unseen Linear-F
- 6mm i/d vinyl tube
- Assembled Inline reservoir
- 1.5m length of 6mm i/d vinyl tube
- Inlet tube
- 2 x self adhesive velcro strips
- Check valve
- Anti-siphon valve
- Power cable
- 4×200mm×5mm cable ties


DIMENSION <

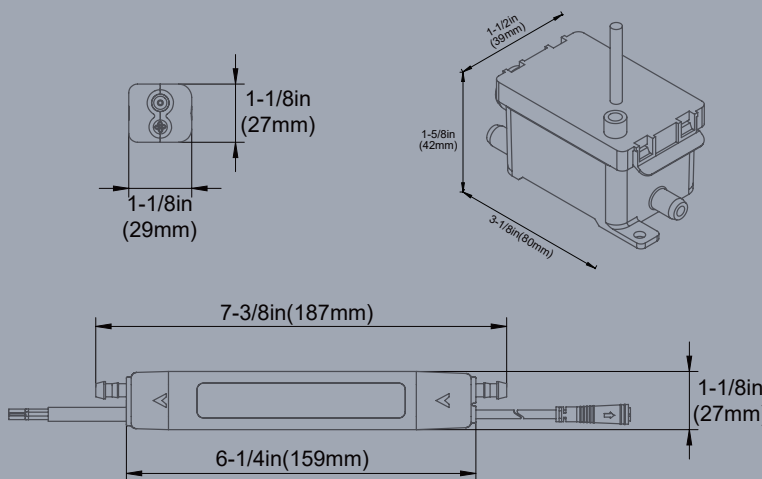

UNSEEN SLIM

- Capacitive sensor
- Variable flow rate
- Diagnostic LED
- Powerful performance
- Built-in operation tracking
- Ultra-quiet operation
- Up to 157,000 Btu/h / 46 kw


- Max. flow **10.6GPH (40L/H)**
- Sound level **16-18dB(A) @ 3.3ft(1M)**
- Max. discharge head **65.6ft(20M)**

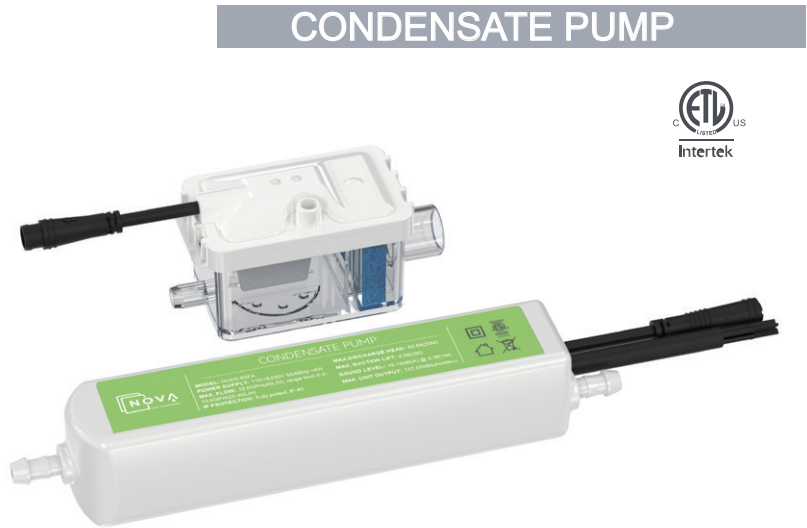


The Unseen Slim features a capacitive sensor for water detection, enhancing reliability over traditional float switches. Its soft-start mode minimizes startup noise and extends the lifespan of the pump and electronic components. A built-in counter tracks operating time and provides alarm notifications for optimal maintenance.

> TECHNICAL DATA		TYPICAL PERFORMANCE <	
Model	NUSS-65FA		
Power supply	115V&230V 50/60Hz		
Power	<4W		
Max. flow	10.6GPH(40L/H), range from 5.3-10.6GPH(20-40L/H)		
Sound level	16-18dB(A) @ 3.3ft(1M)		
Max. discharge head	65.6ft(20M)		
Max. suction lift	6.6ft(2M)		
Max. unit output	157,000Btu/h(46kw)		
Safety switch	3A Normally closed		
Max. water temperature	104°F(40°C)		
Discharge tube	1/4in(6mm) ID		DIMENSION <
Class	II appliance		
Rated	Continuous		
IP Protection	Fully potted, IP-45		
L×W×H	7-1/8" × 1-3/8" × 1-1/4" 180mm × 35mm × 33mm		

- > IN THE BOX
- Assembled Unseen Slim
 - Assembled inline reservoir
 - Plug connector
 - 1.5m length of 6mm i/d vinyl tube
 - Silicone tube 15cm
 - Power cable
 - 1A fuse
 - Anti-siphon valve
 - Check valve
 - 3M tape 2x50mmx20mmx1mm
 - 3M tape 1x50mmx20mmx2.5mm
 - Nylon clamps 4x200mmx4mm

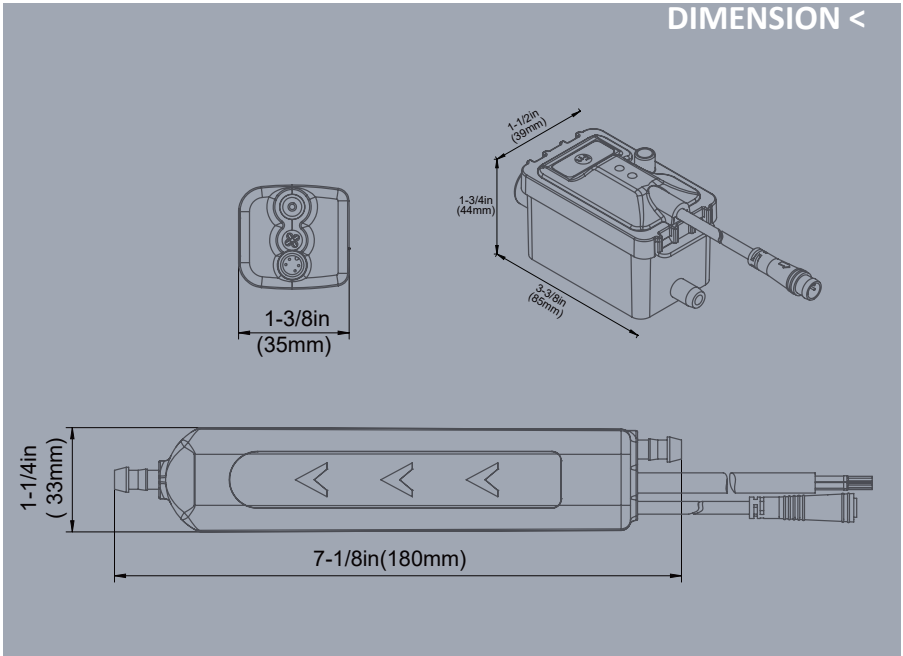


UNSEEN SLIM-F

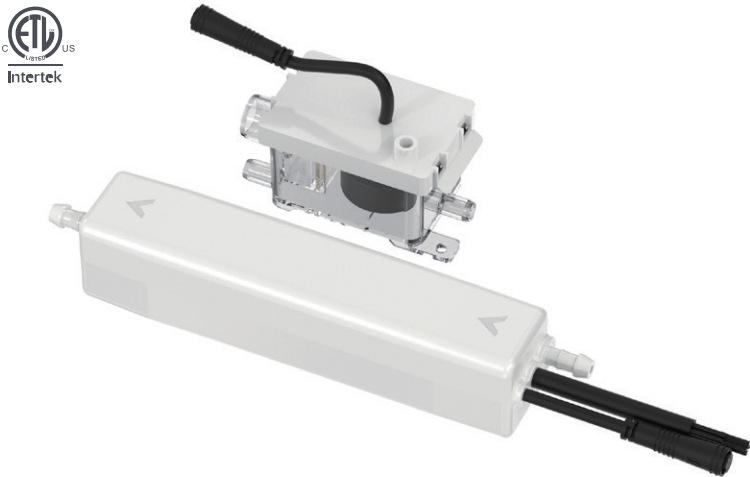

The sleek, compact design of the Unseen series pumps makes them ideal for integration with mini-split and ducted HVAC systems. Operating via float switch mechanism, Unseen series delivers exceptional condensate removal performance while maintaining whisper-quiet operation, ensuring optimal environmental comfort.

> TECHNICAL DATA		TYPICAL PERFORMANCE <	
Model	NUSS-65FA-F		
Power supply	115V&230V 50/60Hz		
Power	<4W		
Max. flow	10.6GPH(40L/H) @ 0 head		
Sound level	20dB(A) @ 3.3ft(1M)		
Max. discharge head	65.6ft(20M)		
Water Storage	40ml		
Max. suction lift	6.6ft(2M)		
Max. unit output	157,000Btu/h(46kw)		
Safety switch	3A Normally closed		
Max. water temperature	158°F(70°C)		DIMENSION <
Discharge tube	1/4in(6mm) ID		
Class	II appliance		
Rated	Continuous		
IP Protection	Fully potted, IPX5		
L×W×H	7-1/8" × 1-3/8" × 1-1/4" 180mm × 35mm × 32mm		

- > IN THE BOX
- Assembled Unseen Slim-F
 - 6mm i/d vinyl tube
 - Assembled inline reservoir
 - 1.5m length of 6mm i/d vinyl tube
 - Inlet tube
 - Self adhesive velcro strips x 2
 - Anti-siphon valve
 - Check valve
 - Power cable
 - 4 x 200mm x 5mm cable ties

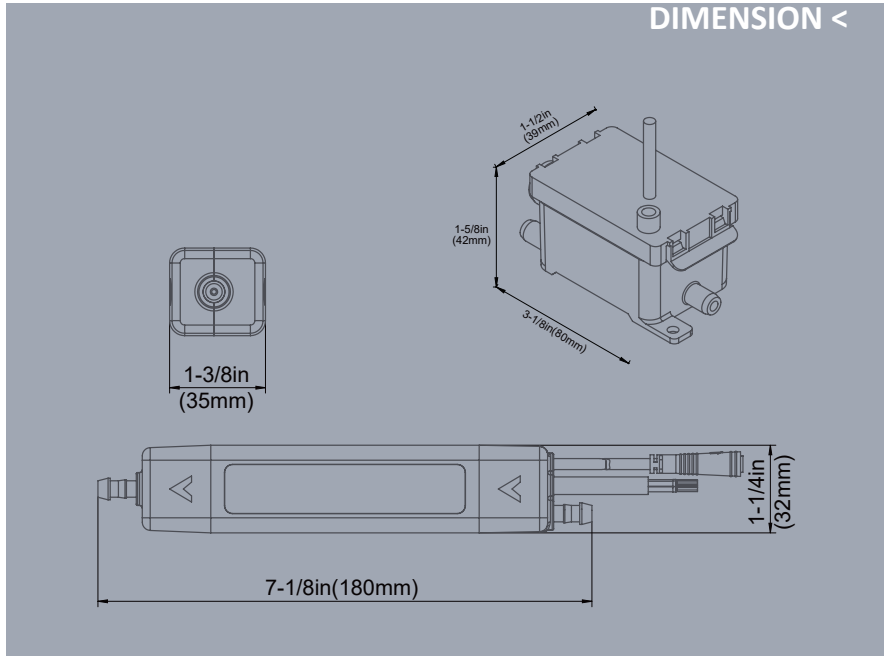

UNSEEN CORNER

- Capacitive sensor
- Variable flow rate
- Diagnostic LED
- Reset function
- Built-in operation tracking
- Installed in trunking elbow
- Up to 54,600 Btu/h / 16 kw


- Max. flow **4.8GPH (18L/H)**
- Sound level **17-19dB(A) @ 3.3ft(1M)**
- Max. discharge head **39.4ft(12M)**

CONDENSATE PUMP




Color can be customized


The Unseen Corner uses a capacitive sensor for water detection, enhancing reliability over traditional float switches. Its soft-start mode minimizes startup noise and extends the lifespan of the pump and electronic components. A built-in counter tracks operating time and provides alarm notifications for optimal maintenance.

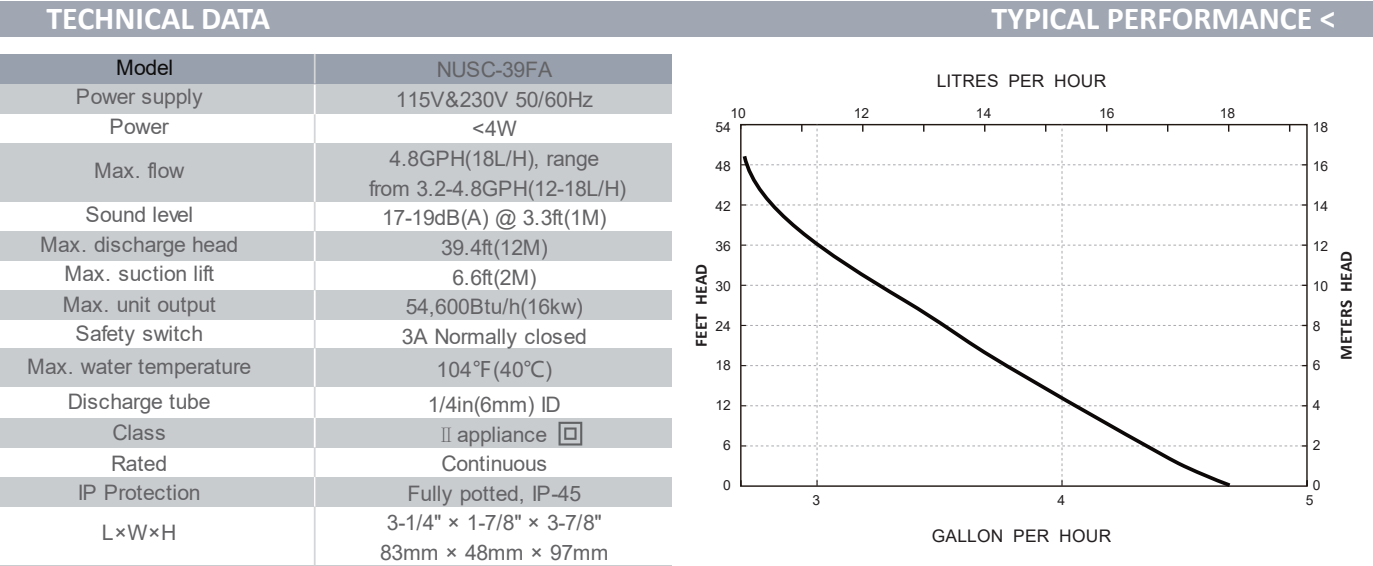

- >IN THE BOX
- Assembled Unseen Corner
 - Breather hole 6mm od
 - Assembled inline reservoir
 - 1.5m length of 6mm i/d vinyl tube
 - Inlet tube
 - Power cable
 - Adapter
 - 4×200mm×5mm cable ties
 - Check valve
 - 1 A fuse
 - Line Set (As option)

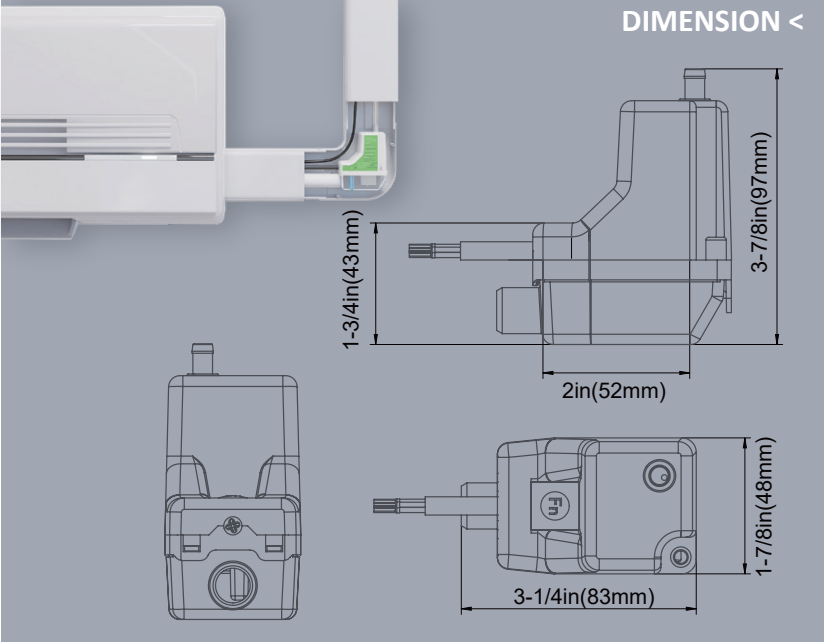

UNSEEN CORNER-F

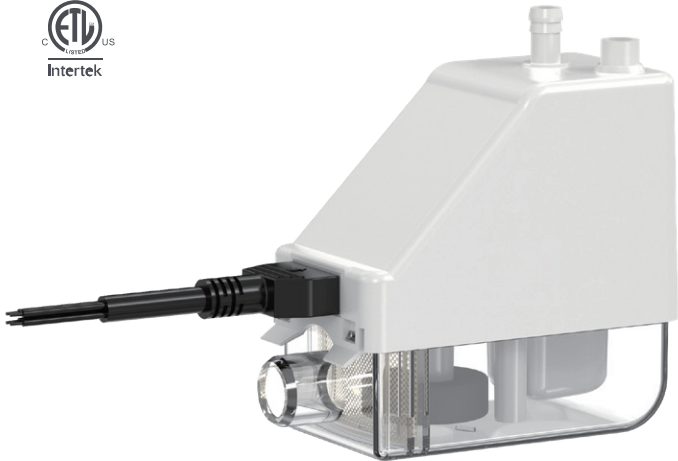


CONDENSATE PUMP


- Float Switch Detection
- Plug & Play
- Fit with trunking elbow
- Anti-vibration
- Silent Operation

- Max flow **10.6GPH(40L/H) @ 0 head**
- Sound level **20dB(A) @ 3.3ft(1M)**
- Max. discharge head **65.6ft(20M)**

The sleek, compact design of the Unseen series pumps makes them ideal for integration with mini-split and ducted HVAC systems. Operating via float switch mechanism, Unseen series delivers exceptional condensate removal performance while maintaining whisper-quiet operation, ensuring optimal environmental comfort.

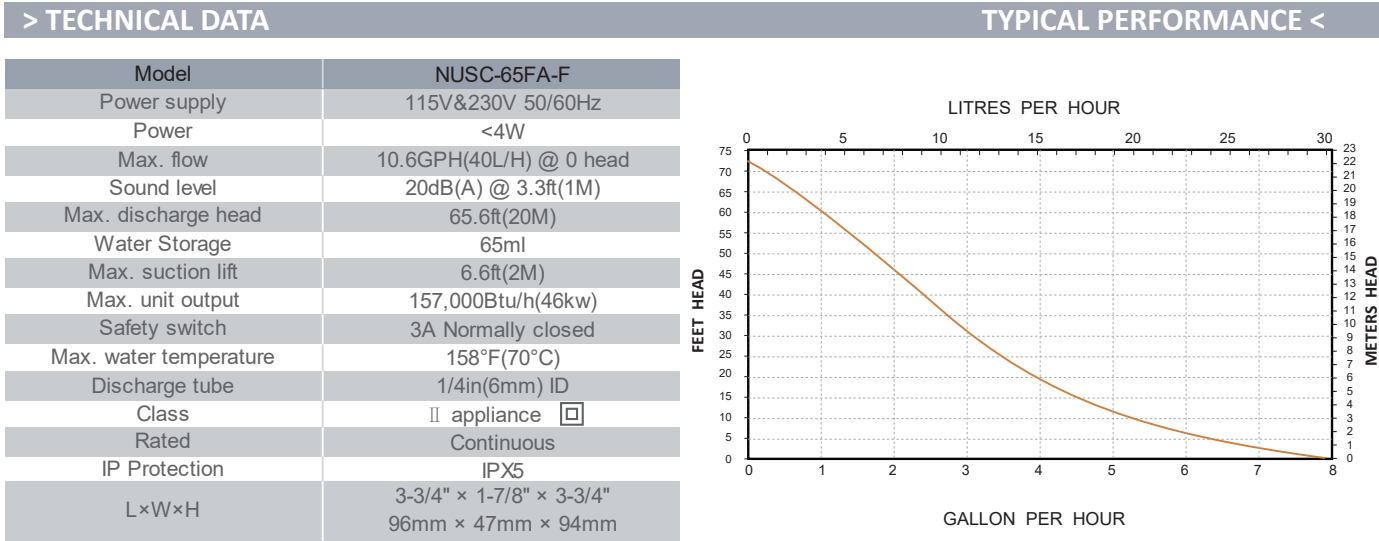

- > IN THE BOX
- Assembled Unseen Corner-F
 - 6mm i/d vinyl tube
 - Assembled inline reservoir
 - 1.5m length of 6mm i/d vinyl tube
 - Inlet tube
 - 4 - pin socket
 - Adapter
 - 4 x 200mm x 5mm cable ties

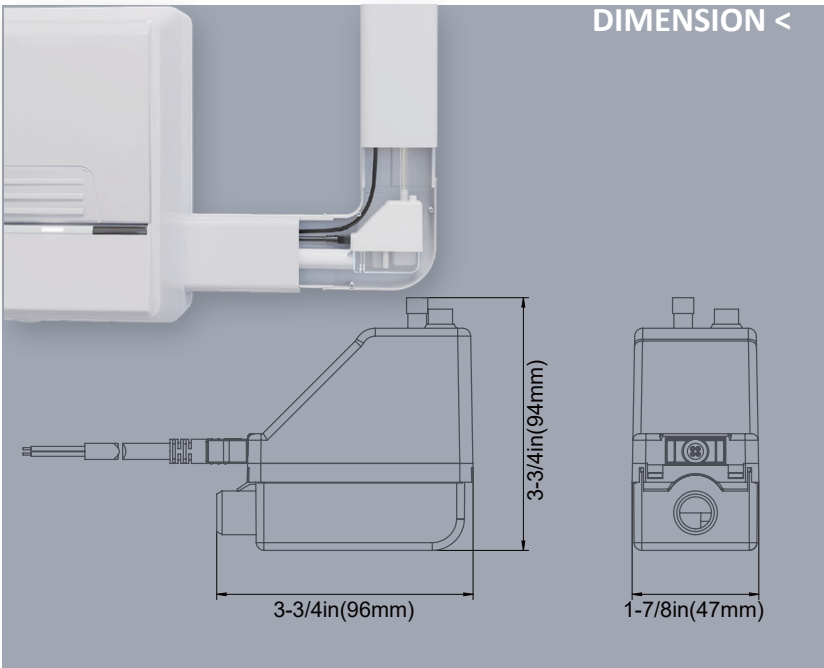

TRAP KIT

- ▣ The trap's clear design enables effortless cleaning and inspection.
- ▣ Equipped with watertight blue caps, ensuring easy access for cleaning both the trap and the drain pan outlet.
- ▣ Provided with brush (optional)

Model	Size
NTRAP34	3/4"



WET SWITCH

- ▣ Automatically cut off the power line/equipment with detection of presence of water
- ▣ LED indicators display operating status
- ▣ Flexible installations; usually placed in a drain pan, or on floor
- ▣ Manual reset for multiple uses
- ▣ Easy and quick installation




Model	Rated Current	Rated Voltage	Electrical Connection Type	Switch
NWETS	3A	12-30VAC 50/60Hz or 12-36VDC	Independently powered	Normally closed (N/C) Normally open (N/O)



TRANSPARENT PIPE

Model	NTP14-82F	NTP38-82F	NTP12-82F	NTP58-82F
	NTP 14-100F	NTP38-100F	NTP 12-100F	NTP58-100F
Size	1/4"	3/8"	1/2"	5/8"
Diameter ID (mm)	6	10	12	15
Diameter OD (mm)	9	14	16	50
Length per roll	82ft(25m) / 100ft(30m)			
Material	PVC			
Temperature	50°F~140°F(10°C~60°C)			

INLINE RESERVOIR

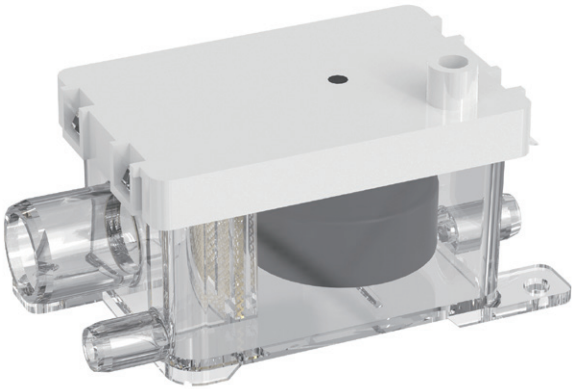

- Assembled inline reservoir includes:
- Lid & sensor cable
 - Float
 - Fiter
 - Reservoir



- Assembled inline reservoir includes:
- Lid & sensor cable
 - Fiter
 - Reservoir

PRODUCT ACCESSORIES

CHECK VALVE



- Unidirectional adaptor

ANTI-SIPHON JOINT




- Prevent siphon; Used in AquaFlow & Unseen series pumps

PLASTIC CABLE TIES



- Hold tubes firmly in place to prevent movement, vibration, and sagging

INLET FILTER



- Prevent dirt from entering the pump directly

INLET HOSE



- Customizable Lengths per Request

MAGNET FLOAT



- Used in AquaFlow & Unseen series pumps